
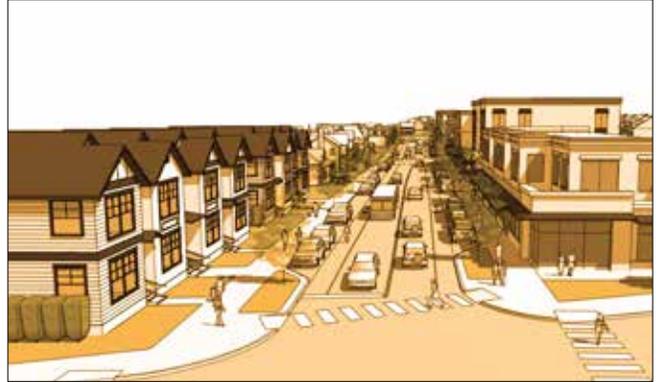


# Haywood Road Form District

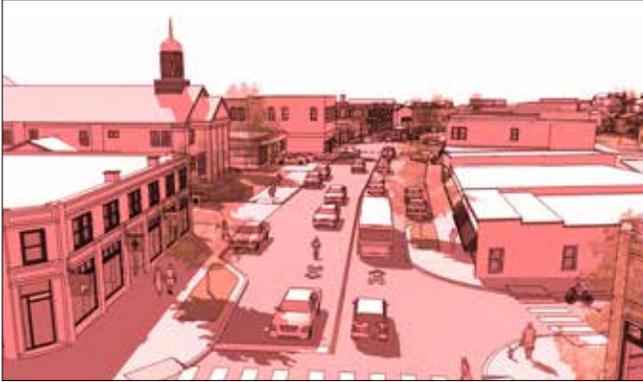

City of Asheville, North Carolina

**ADOPTED BY ASHEVILLE CITY COUNCIL**

September 9, 2014

## 1.0. General Provisions

1.1. Purpose. . . . .	1
1.2. Intent . . . . .	1
1.3. Applicability. . . . .	1
1.4. Transitional Provisions . . . . .	2

## 2.0. Districts

2.1. Districts Established. . . . .	3
2.2. Rules Applicable to All Districts. . . . .	4
2.3. HR-1: Core . . . . .	18
2.4. HR-2: Expansion . . . . .	22
2.5. HR-3: Corridor. . . . .	26
2.6. HR-4: Traditional . . . . .	30
2.7. HR-5: Live-Work . . . . .	34
2.8. HR-6: Town. . . . .	38

## 3.0. Land Use

3.1. Classification of Uses . . . . .	42
3.2. Permitted Use Table . . . . .	43
3.3. Special Standards . . . . .	46

## 4.0. Site Development

4.1. Parking . . . . .	47
4.2. Landscaping and Screening. . . . .	50
4.3. Signs . . . . .	51
4.4. Outdoor Display and Storage . . . . .	61

## 5.0. Administration

5.1. Form-Based Code Administration . . . . .	62
---	----

## 6.0. Definitions

6.1. Defined Terms . . . . .	63
------------------------------	----

## 1.1. Purpose

The purpose of the Haywood Road Form District is to implement the Haywood Road Corridor Charrette Report and the Haywood Road Vision Plan.

## 1.2. Intent

It is the intent of this Haywood Road Form District to:

1. Where feasible, preserve and enhance existing buildings and structures along the Corridor.
2. Ensure a high quality of development for new construction;
3. Reduce the bulk and mass of buildings;
4. Ensure adequate distribution of height and mass throughout the Corridor, with larger buildings located closer to Patton Avenue;
5. Allow for a mix of uses at a variety of scales;
6. Promote additional housing types and housing opportunities;
7. Make the Corridor more walkable and pedestrian-friendly;
8. Implement the complete streets model by enhancing multi-modal transportation options, including transit, bicycle and pedestrian connections;
9. Calm traffic and improve vehicular circulation;
10. Support existing businesses; and
11. Ensure adequate transitions from the Corridor to adjacent residential neighborhoods.

## 1.3. Applicability

### A. Territorial Application

The Haywood Road Form District applies to all property located within the Haywood Road Corridor, as shown in Sec. 2.1.

### B. Application of Chapter 7, Development

1. The following requirements of Chapter 7 do not apply in the Haywood Road Form District, unless expressly stated otherwise:
  - a. § 7-10-2. Required setbacks; allowable encroachments into required setbacks.
  - b. § 7-11-4. Open space standards.
  - c. § 7-11-6. Traffic impact analysis.
  - d. 7-8-1d. Table of Uses
  - e. 7-11-2c. Off-street parking requirements
  - f. 7-13-4b and c. On-premise signs and single and multi-tenant signs.
2. The use of buildings and land within the Haywood Road Form District is subject to all other regulations as well as the Haywood Road Form District, whether or not such other provisions are specifically referenced in the Haywood Road Form District. References to other regulations or provisions of the Haywood Road Form District are for the convenience of the reader. The lack of a cross-reference does not exempt a land, building, structure or use from other regulations.

### C. Conflicting Provisions

1. Interpretation of conflicts between the Haywood Road Form District and any other City ordinance or regulation (including Chapter 7) are controlled by the Haywood Road Form District.
2. The graphics, illustrations and photographs used to visually explain certain provisions of Haywood Road Form District are for illustrative purposes only. Where there is a conflict between a graphic, illustration or photograph and the text, the text controls.

## 1.4. Transitional Provisions

### A. New Development

1. Except as provided in Sec. 1.4.C below, upon the effective date of the Haywood Road Form District or any subsequent amendment, any new building, additions or other structure or any use of land must be constructed or developed only in accordance with all applicable provisions of the Haywood Road Form District.
2. No excavation or filling of land or construction of any public or private improvements may take place or commence except in conformity with the Haywood Road Form District.

### B. Existing Development


Any existing use, lot, building or other structure legally established prior to the effective date of the Haywood Road Form District that does not comply with any provision of these specific regulations is a legal non-conformity pursuant to Article 18.

### C. Previously Issued Permits and Pending Applications

Previously issued permits and pending applications will be processed in accordance with and decided pursuant to the law existing on the date the application was filed.

## 2.0. DISTRICTS

### 2.1. Districts Established

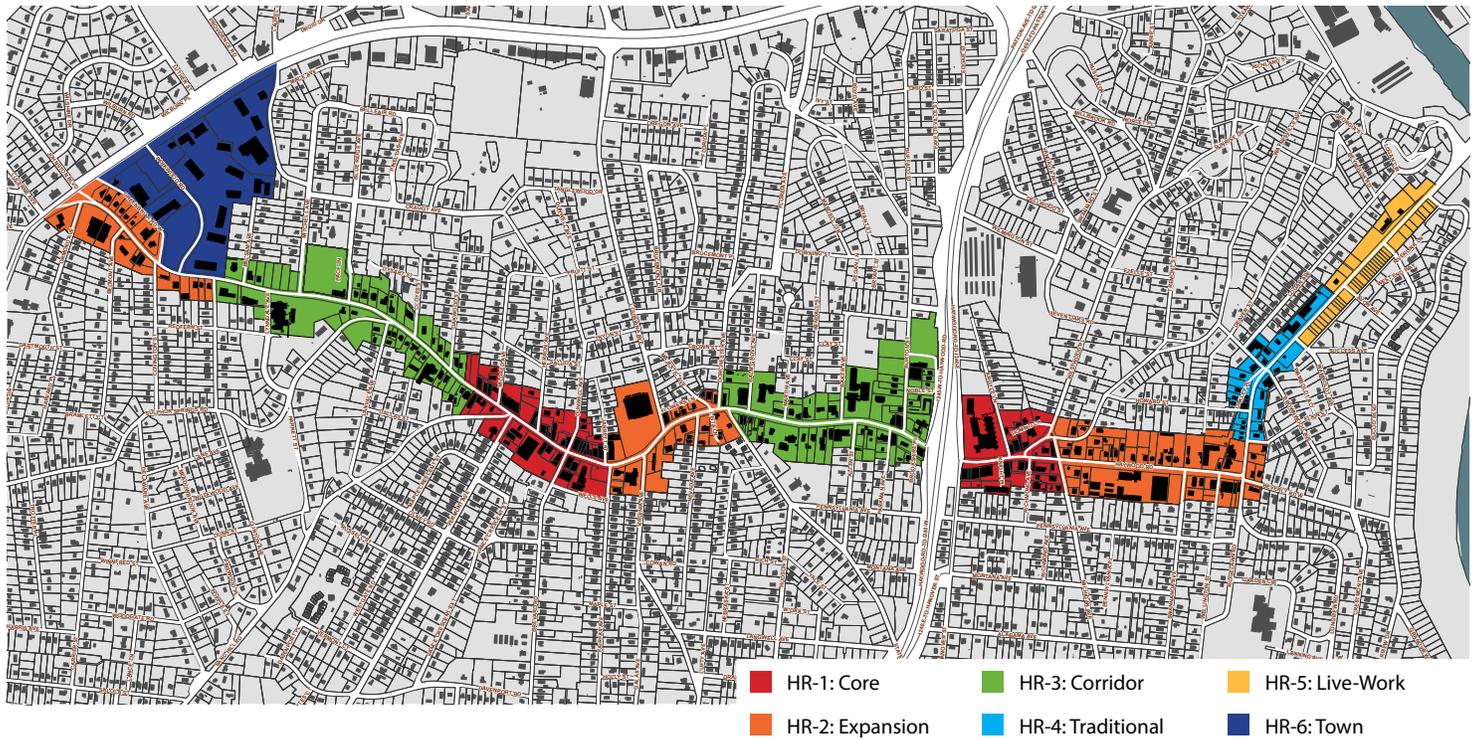

The following Haywood Road sub-districts are established and are part the Official Zoning Map.

1. ■ HR-1: Core
2. ■ HR-2: Expansion
3. ■ HR-3: Corridor
4. ■ HR-4: Traditional
5. ■ HR-5: Live-Work
6. ■ HR-6: Town

## 2.0 DISTRICTS

### 2.2. Rules Applicable to All Districts

The following general rules apply to all Haywood Road sub-districts unless expressly stated otherwise.

#### A. Lot

##### 1. Defined


A parcel of land either vacant or occupied intended as a unit for the purpose, whether immediate or for the future, of transfer of ownership, or possession, or for development.

##### 2. Lot Area

Lot area is the area included within the rear, side and front lot lines. Lot area does not include existing or proposed right-of-way, whether dedicated or not dedicated to public use.

##### 3. Lot Width

Lot width is the distance between the two side lot lines measured at the primary street property line along a straight line or along the chord of the property line on a curvilinear lot.

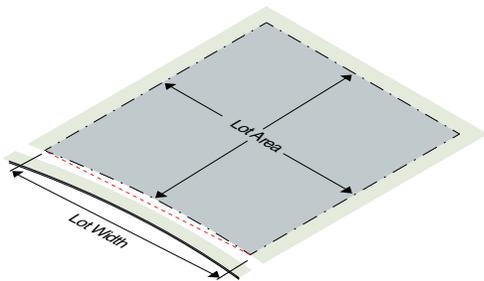

#### B. Building Coverage

1. The maximum area of the lot that is permitted to be covered by buildings, including both principal structures, structured parking and roofed accessory structures, including gazebos.
2. Building coverage does not include paved areas such as driveways, uncovered porches or patios, decks, swimming pools, porte cochere, or roof overhangs of two feet or less. Surface parking is not considered part of building coverage.


#### C. Outdoor Amenity Space

##### 1. General

Where required, outdoor amenity space must be provided on the lot and must be available as unenclosed exterior space appropriately improved for pedestrian amenity, rooftop space, or for aesthetic appeal and cannot include areas used for vehicles, except for incidental service, maintenance or emergency actions only. Outdoor amenity space may be public or private.

##### 2. Standards

- a. Outdoor amenity space may be met in one contiguous open area or in multiple open areas on the lot; however, to receive credit, the area must be at least 7 feet in width and length, and at least 60% of the required amenity space must be located in one contiguous open area.

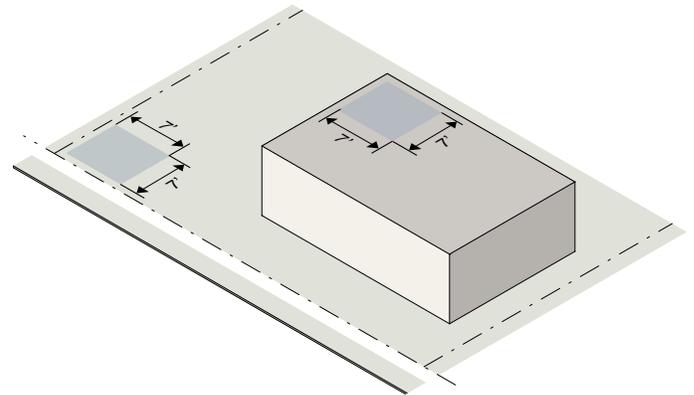

- b. Outdoor amenity space may be located at or above grade, except in HR-3: Corridor, where at least 50% of the required outdoor amenity space must be located at grade.
- c. Outdoor amenity space may be roofed but cannot be permanently enclosed.
- d. Outdoor amenity space cannot be parked or driven upon, except for

## 2.0. DISTRICTS

### 2.2. Rules Applicable to All Districts

emergency access and permitted temporary events.

- e. In calculating the minimum outdoor amenity space requirement, the following listed facilities, and any similar facilities, may be included:


- i. Ground-level facilities such as a swimming pool, playground, sport court, dog park, garden, community garden, park, green, pavilion, courtyard, seating area, outdoor dining area or plaza; and
- ii. Upper-level facilities such as a shared or common balcony, rooftop deck or rooftop garden.

- f. A required property line buffer is not considered outdoor amenity space.

#### D. Building Setbacks

##### 1. Generally

There are 4 types of setbacks – primary street, side street, side interior and rear. Building setbacks apply to both principal and accessory buildings and structures except where explicitly stated otherwise.

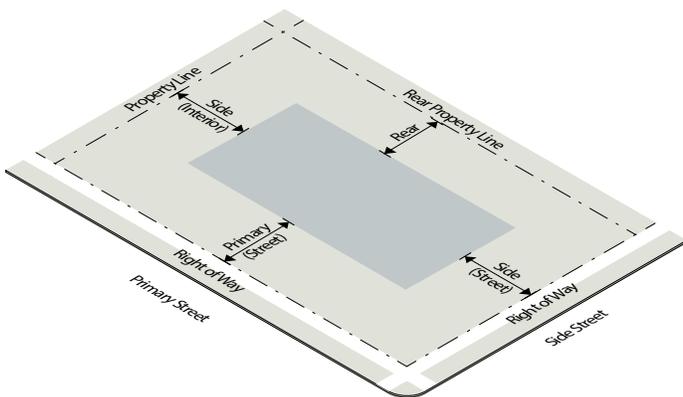

##### 2. Measurement of Building Setbacks

- a. The primary street setback is measured at a right angle from the primary street right-of-way line.

- b. On corner lots, the side street setback is measured at a right angle from the side street right-of-way line.
- c. The rear setback is measured at a right angle from the rear property line or the rear right-of-way or easement line where there is an alley. The rear property line is the property line opposite to the primary street property line.
- d. All lot lines which are not primary street, side street or rear lot lines are considered side interior lot lines for the purpose of measuring setbacks. Side interior setbacks are measured at a right angle from the side property line.

##### 3. Primary Street Designation

- a. Where only one street abuts a lot, that street is considered a primary street.
- b. Where more than one street abuts a lot, Haywood Road or Patton Avenue are considered the primary street.


## 2.0. DISTRICTS

### 2.2. Rules Applicable to All Districts

#### E. Build-to Zone (BTZ)


##### 1. Defined

- a. The build-to zone (BTZ) is the area on the lot where a certain percentage of the front building facade must be located, measured as a minimum and maximum setback range from the edge of the right-of-way.
- b. The required percentage specifies the amount of the front building facade that must be located in the build-to zone, measured based on the width of the building divided by the width of the lot.

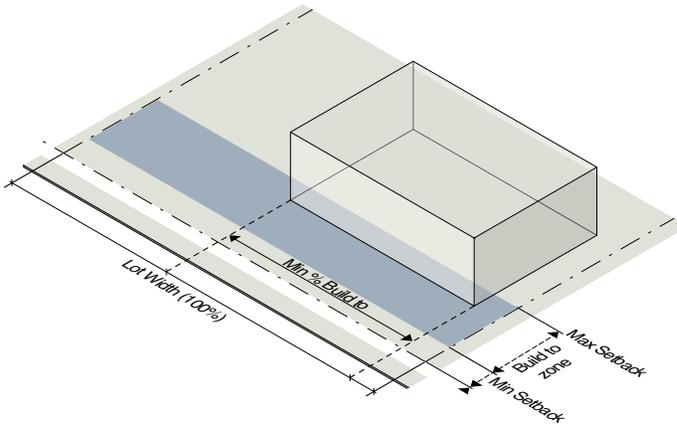

##### 2. Corner Lots

On a corner lot, a building facade must be placed within the build-to zone for the first 30 feet along the street extending from the block corner, measured from the intersection of the two right-of-way lines.

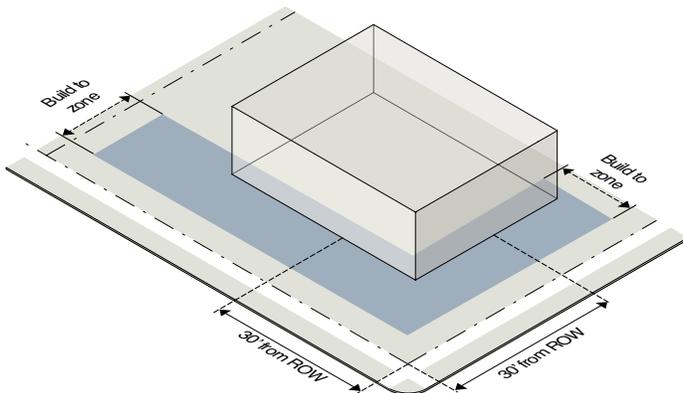

##### 3. Uses Allowed

With the exception of parking spaces and outdoor storage, all structures and uses (including outdoor dining) allowed on the lot are allowed in the build-to zone.


#### F. Nonconforming Build-to Zone

##### 1. Additions

Expansion of an existing building which is unable to meet the build-to requirement must comply with the following nonconforming provisions:

##### a. Front: Addition

Any addition to the front must be placed in the build-to zone; however, the addition does not have to meet the build-to percentage for the lot. A front addition is not allowed on a contributing structure in a National Register District or a structure that is eligible for historic designation (although a variance may be granted where a hardship exists, including but not limited to a conflict with the Building Code or specific purposes for the addition that make a front location the most technically (not financially) feasible option.

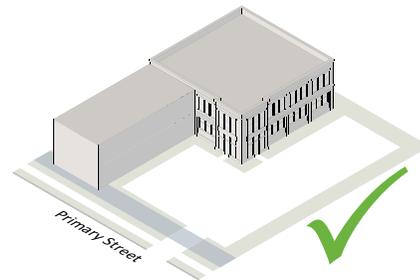


## 2.0. DISTRICTS

### 2.2. Rules Applicable to All Districts

#### b. Rear: Addition


One-story or multi-story rear additions are allowed because the extension does not increase the degree of the nonconformity.

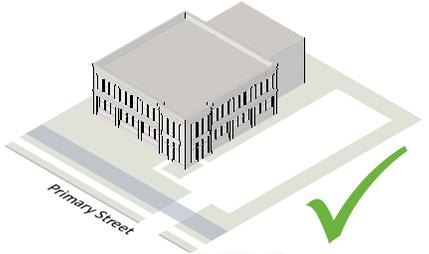

#### c.Side: Addition

One-story or multi-story side additions meeting the following conditions are allowed:

- i. The side addition is no greater than 500 square feet in area or 20% of the existing building footprint, (whichever is greater), and is less than 50% of the existing building width measured along the primary street.

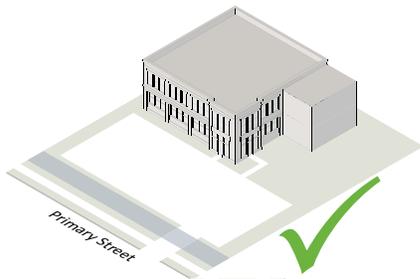


- ii. In the case of a contributing structure in a National Register District (or a structure eligible for designation), the side addition can be placed no closer than 5 feet from the street-facing facade of the building.

#### 2. New Buildings

Where a new building is being constructed on a lot or site with an existing building on it that doesn't meet the build-to requirement, the following nonconforming provisions apply.


#### a.Front: New Building

All new buildings must be placed in the build-to zone until the build-to percentage for the lot has been met.

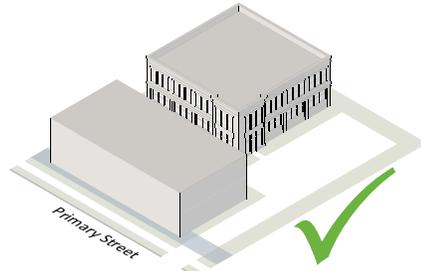


#### b. Rear: New Building

New buildings located outside of the build-to zone are not allowed until the build-to percentage for the lot has been met.

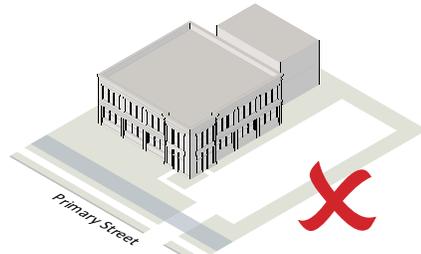

#### c.Side: New Building

New buildings located outside of the build-to zone are not allowed until the build-to percentage for the lot has been met.

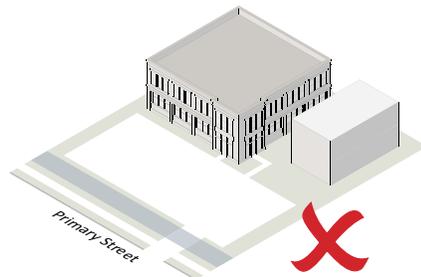

#### d. Accessory Structures: New Structure

New accessory structures must be placed behind or to the side of the principal building and may not exceed 500 square feet. Outdoor dining may be placed at the front of the lot to enhance the activity at the sidewalk. One-story accessory structures are permitted.

## 2.0. DISTRICTS

### 2.2. Rules Applicable to All Districts

#### G. Setback Encroachments

All buildings and structures must be located at or behind the required setbacks except as listed below. Unless specifically stated, no building or structure can extend into a required easement or public right-of-way.

##### 1. Building Features

- a. Porches, stoops, balconies, galleries and awnings/canopies can extend into a required primary street setback as stated in Sec. 2.2.R
- b. Building eaves, roof overhangs, gutters, downspouts, light shelves, bay windows and oriels less than 10 feet wide, cornices, belt courses, sills, buttresses or other similar architectural features may encroach up to 3 feet into a required setback, provided that such extension is at least 2 feet from the vertical plane of any lot line.
- c. Chimneys or flues may encroach up to 4 feet, provided that such extension is at least 2 feet from the vertical plane of any lot line.
- d. Unenclosed patios, decks, balconies, stoops, porches, terraces or fire escapes may encroach into a side interior or rear setback, provided that such extension is at least 6 feet from the vertical plane of any lot line and bufferyard requirements, if any, are met.
- e. Handicap ramps may encroach to the extent necessary to perform their proper function.
- f. Structures below and covered by the ground may encroach into a required setback.

##### 2. Low Impact Stormwater Features

- a. Low impact stormwater management features may encroach up to 2 feet into a primary street setback (but not into the required sidewalk), including, but not limited to:
  - i. Rain barrels or cisterns, 6 feet or less in height;
  - ii. Planter boxes;
  - iii. Bio-retention areas; and
  - iv. Similar features, as determined by the City Engineer.
- b. Low impact stormwater management features listed above may encroach into a side interior or rear setback, provided such extension is at least 2 feet from the vertical plane of any lot line.

##### 3. Mechanical Equipment and Utility Lines

- a. For residential buildings only, mechanical equipment such as HVAC units and security lighting, may encroach into a required rear or side interior setback, provided that such extension is at least 3 feet from the vertical plane of any lot line.
- b. Minor structures accessory to utilities (such as hydrants, manholes, and transformers and other cabinet structures) may encroach into a required rear, side interior or side street setback.

##### 4. Other Setback Encroachments


- a. Fences and walls under § 7-10-3.
- b. Property line buffers under Sec. 4.2.
- c. Signs under Sec. 4.3.

## 2.0. DISTRICTS


### 2.2. Rules Applicable to All Districts

#### H. Building Height


1. Building height is regulated in both number of stories and feet and is measured from the average grade to the mean height level between the eaves and ridge of a gable, hip, mansard, or gambrel roof or to the highest point of roof surface of a flat roof, not including a maximum 6-foot high parapet wall encroachment. In no case is a parapet allowed to exceed 6 feet in height above the roof deck.

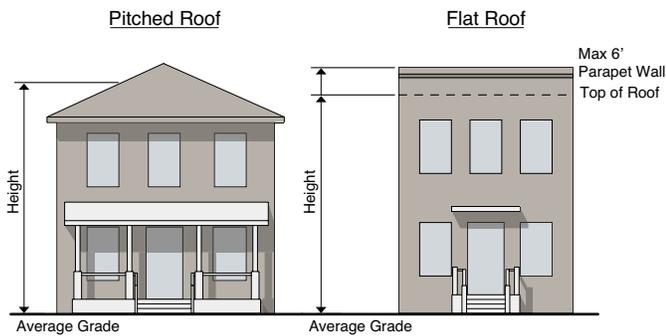


2. Average grade is determined by calculating the average of the highest and lowest elevation along natural or improved grade (whichever is more restrictive) along the front of the building parallel to the primary street setback line.

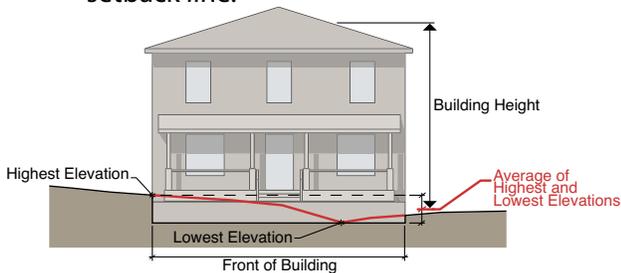

3. New principal structures must be a minimum height of 2 stories. Any second story must be finished out for occupancy.
4. Where a lot slopes downward from the front property line, one story that is additional to the specified maximum number of stories may be built on the lower, rear portion of the lot.

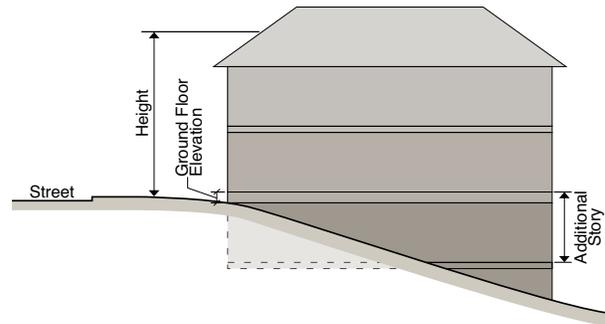

5. An attic does not count as a story where 50% or more of the attic floor area has a clear height of less than 7½ feet; measured from the finished floor to the finished ceiling.

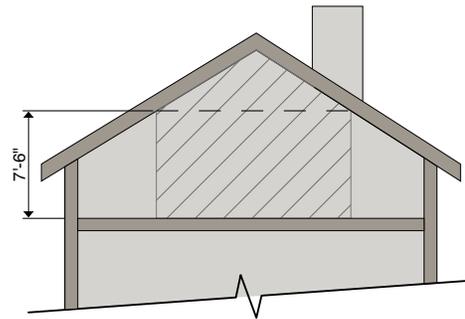

6. A basement with 50% or more of its perimeter wall area surrounded by natural grade is not considered a story.

#### I. Height Encroachments

Any height encroachment not listed below is prohibited.

1. The maximum height limits of the district do not apply to spires, belfries, cupolas, domes not intended for human occupancy; monuments, water tanks, water towers or other similar structures which, by design or function, must exceed the established height limits.
2. The following specified accessory structures, building and site features, and mechanical equipment may exceed the established height limit provided they do not exceed the maximum height by more than 6 feet:


## 2.0. DISTRICTS

### 2.2. Rules Applicable to All Districts

- a. Chimney, flue or vent stack;
  - b. Flagpole;
  - c. Vegetation associated with a rooftop garden or landscaping;
  - d. Skylights;
  - e. Parapet wall; and
  - f. Solar panels, wind turbines and rainwater collection systems.
3. The following may exceed the established height limits provided they do not exceed the maximum building height by more than 10 feet, do not occupy more than 25% of the roof area, and are set back at least 10 feet from the edge of the roof:
- a. Elevator or stairway access to roof;
  - b. Rooftop shade structure;
  - c. Greenhouse; and
  - d. Mechanical equipment.
4. Any of the elements listed in paragraphs 2. and 3. above are considered accessory to the principal structure and must not be used for any purpose other than as incidental to the principal structure.

#### J. Ground Floor Elevation


1. Ground floor elevation is measured from top of the adjacent curb to the top of the finished ground floor.
2. Minimum ground floor elevation applies to the first 30 feet of the lot measured from the right-of-way line.

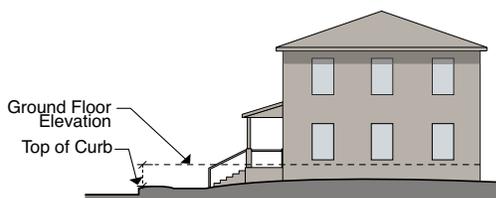

3. Ground floor elevation must meet the accessibility requirements of the NC Building Code.

#### K. Story Height

1. Story height is measured from the top of the finished floor to the ceiling above.
2. Minimum ground story height applies to the first 30 feet of the building measured inward from the street-facing facade. At least 50% of the ground story must meet the minimum height provisions.
3. At least 80% of each upper story must meet the minimum upper story height provisions.

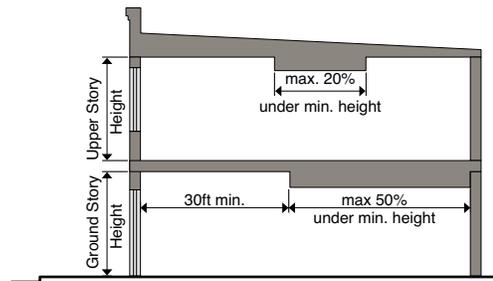

#### L. Transparency

1. The minimum percentage of windows and doors that must cover a ground story facade. The transparency percentage is derived by dividing the transparent area of ground story windows and doors between 2 and 12 feet above the adjacent sidewalk by the total area of the ground story facade along the primary or side street.



2. The minimum transparency percentage of windows and doors that must cover an upper story facade is measured from top of

## 2.0. DISTRICTS


### 2.2. Rules Applicable to All Districts

the finished floor to the top of the finished floor above. When there is no floor above, upper story transparency is measured from the top of the finished floor to the top of the wall plate. The percentage is derived for each upper story based on the transparent area of upper story windows and doors divided by the total area of the upper story facade.

3. Transparency applies to primary and side street-facing facades only.
4. Glass is considered transparent where it has a transparency higher than 80% and external reflectance of less than 15%.
5. An opening to a parking garage is not considered transparency. Any clear glass in a garage door for a restaurant or entertainment use (and not for loading purposes) is considered transparent.

#### M. Blank Wall Area


1. Blank wall area means a portion of the exterior facade of the building that does not include: windows or doors; columns, pilasters or other articulation greater than 12 inches in depth; or a substantial material change (paint color is not considered a substantial change). The same material used in a different pattern does not constitute a substantial material change.

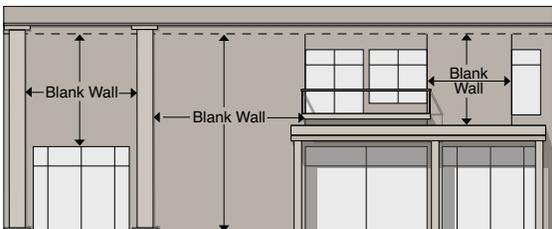

2. Blank wall area applies in both a vertical and horizontal direction and to ground and upper story primary and side street-facing facades.

#### N. Pedestrian Access

1. An entrance providing both ingress and egress, operable to residents or customers at all times during operating hours, is required to meet the street-facing entrance requirements. Additional entrances off another street, pedestrian area or internal parking area are permitted.
2. The entrance spacing requirements must be met for each building, but are not applicable to adjacent buildings.

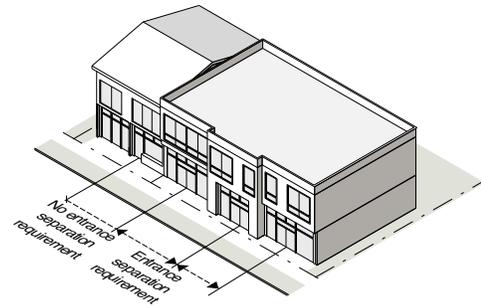

3. Doors are not permitted to swing into public rights-of-way.
4. An angled entrance may be provided at either corner of a building along the street to meet the street-facing entrance requirements.


## 2.0. DISTRICTS

### 2.2. Rules Applicable to All Districts

#### O. Neighborhood Compatibility

##### 1. Building Stepback

- a. A building stepback is required when form district property is abutting an RS or RM district. When abutting an RS or RM district, a building must not extend into a 45-degree angular plane projecting over the subject property measured from a height of 40 feet at the side interior or rear setback line. One foot of additional setback is required for every foot of height above 40 feet.

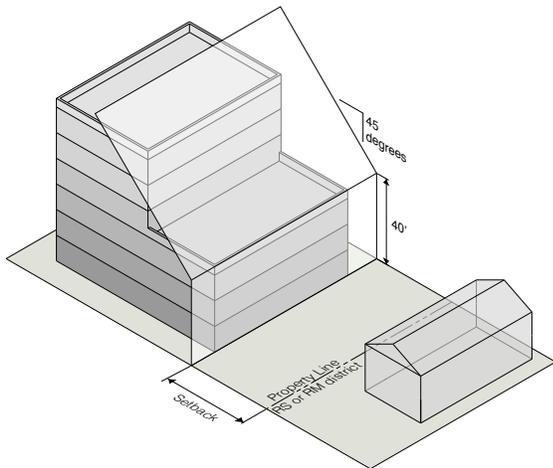

- b. The building stepback ends at any public street (not including an alley) or 150 feet from the RS or RM district property line, whichever is less.

##### 2. Property Line Buffer

A property line buffer meeting the standards of Sec. 4.2 is required where a Haywood Road Form District abuts a RS or RM district.


#### P. Building Materials

##### 1. Applicability

The following requirements apply to all street-facing facades of a building.

##### 2. Use of Materials

- a. Traditional materials such as brick, terra-cotta, natural stone, cast stone, metal, glass, concrete are preferred for new construction and renovations. Non-traditional materials such as unpainted rough-sawn wood and materials with a rustic image are used carefully and in ways that relate to their traditional context. The use of modern sustainable or green materials may justify deviations from the use of traditional materials. Synthetic finishing system materials are not permitted at the ground or street level.
- b. Primary material changes must occur at inside corners or where they wrap around an outside corner a minimum of 2 feet.

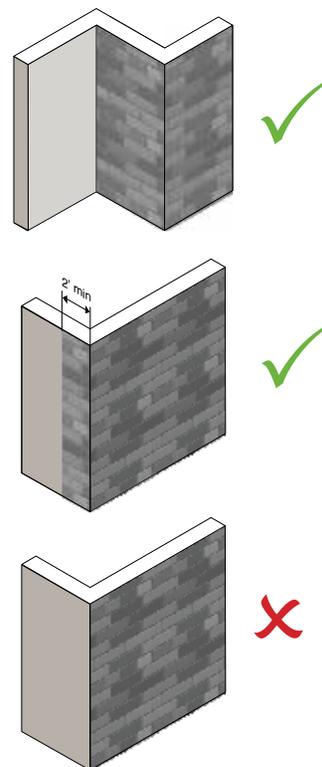

## 2.0. DISTRICTS

### 2.2. Rules Applicable to All Districts

- c. When using more than one primary material in a facade, one is required as the main theme, with the others acting only to complement and accentuate the design.
- d. Openings in masonry facades should express a structural lintel or arch to show how they are carrying the weight above.

#### Q. Streets, Sidewalks and Driveways



1. If an appropriate width sidewalk and street trees do not exist or do not meet the sub-district requirements, the developer is responsible for installation sidewalk and street trees as shown in Sec. 2.3 through Sec. 2.6. Modified dimensions may be approved by the City Traffic Engineer to account for existing street widths and building locations.
2. The required sidewalk may be wholly or partially located on private property, provided the sidewalk is located within an easement permanently dedicated to the City.
3. Where vehicular access is provided to a site, it must occur from a side street and not from Haywood Road, unless this option is determined infeasible by the City Traffic Engineer. For sites that must be accessed from Haywood Road, no more than one driveway is allowed with a maximum width of 24 feet.
4. The City Traffic Engineer may require the closure of existing curb cuts on Haywood Road where proposed site and building improvements exceed 75% of the appraised value of the existing improvements (as determined by Buncombe County Tax Assessor or by an MAI-certified real estate appraiser) and alternatives to access from Haywood Road are available.

## 2.0. DISTRICTS

### 2.2. Rules Applicable to All Districts

#### R. Building Elements

Individual building elements are allowed for by sub-district (see Sec. 2.3 through Sec. 2.6)

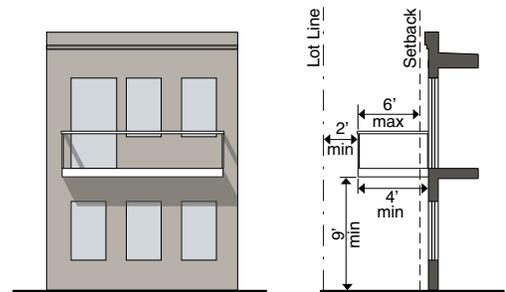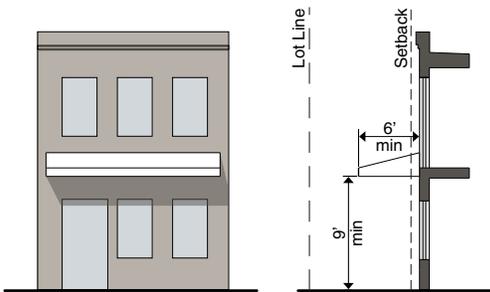

##### 1. Awning/Canopy

A wall-mounted, cantilevered structure providing shade and cover from the weather for a sidewalk.

- a. An awning/canopy must be a minimum of 9 feet clear height above the sidewalk and must have a minimum depth of 6 feet. The Planning and Development Director may approve a modification to these standards in order to fit an awning or canopy on an existing building.
- b. An awning/canopy may extend into a required setback above private property.
- c. An awning/canopy may encroach up to 9 feet into the public right-of-way but must be at least 2 feet inside the curb line or edge of pavement, whichever is greater. The encroachment requires City or DOT approval, based on the ownership of the right-of-way.


##### 2. Balcony

A platform projecting from the wall of an upper-story of a building with a railing along its outer edge, often with access from a door or window.

- a. A balcony must be at least 4 feet deep and may extend up to 6 feet into a required setback, provided that such extension is at least 2 feet from the vertical plane of any lot line.
- b. A balcony must have a clear height above the sidewalk of at least 9 feet.
- c. A balcony may be covered and screened, but cannot be fully enclosed.
- d. A balcony may encroach up to 6 feet into the public right-of-way but must be at least 2 feet inside the curb line or edge of pavement, whichever is greater. The encroachment requires City or DOT approval, based on the ownership of the right-of-way.

## 2.0. DISTRICTS


### 2.2. Rules Applicable to All Districts

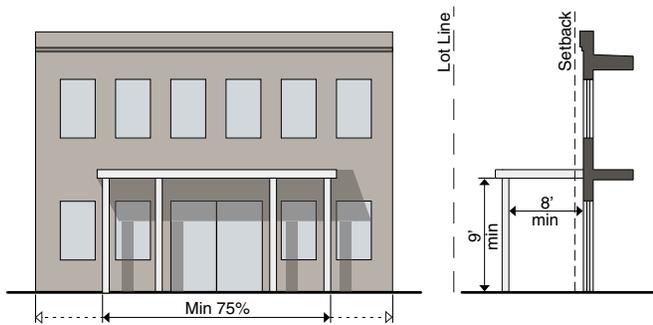

#### 3. Gallery

A covered passage extending along the outside wall of a building supported by arches or columns that is open on 3 sides.

- A gallery must have a clear depth from the support columns to the building's facade of at least 8 feet and a clear height above the sidewalk of at least 9 feet.
- A gallery must be contiguous and extend over at least 75% of the width of the building facade from which it projects.
- A gallery may extend into a required setback.
- A gallery may encroach up 9 feet into the public right-of-way but must be at least 2 feet inside the curb line or edge of pavement, whichever is greater. The encroachment requires City or DOT approval, based on the ownership of the right-of-way.

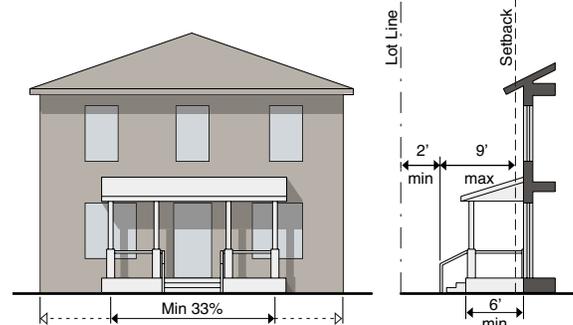


#### 4. Front Porch

A raised structure attached to a building, forming a covered entrance to a doorway.

- A front porch must be at least 6 feet deep (not including the steps).
- A front porch must be contiguous, with a width not less than 33% of the building facade from which it projects.
- A front porch must be roofed and may be screened, but cannot be fully enclosed.
- A front porch may extend up to 9 feet, including the steps, into a required setback, provided that such extension is at least 2 feet from the vertical plane of any lot line.
- A front porch may not encroach into the public right-of-way.

## 2.0. DISTRICTS


### 2.2. Rules Applicable to All Districts

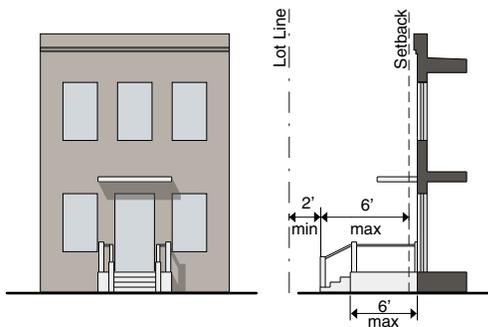

#### 5. Stoop

A small raised platform that serves as an entrance to a building.

- A stoop must be no more than 6 feet deep (not including the steps) and 6 feet wide.
- A stoop may be covered but cannot be fully enclosed (must not be screened in).
- A stoop may extend up to 6 feet, including the steps, into a required setback, provided that such extension is at least 2 feet from the vertical plane of any lot line.
- A stoop may not encroach into the public right-of-way.

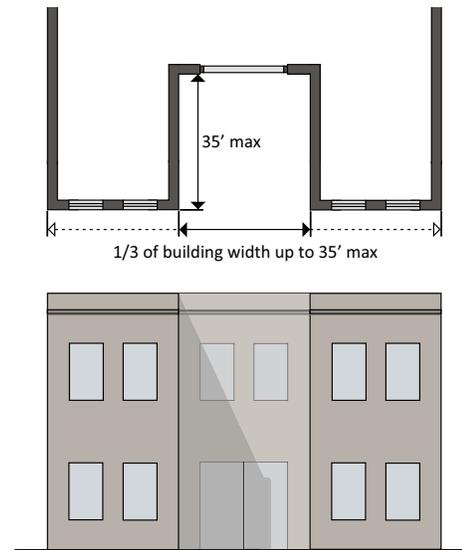



#### 6. Courtyard

An open area at grade, or within 30 inches of grade, that serves as an open space, plaza or outdoor dining area, that does not extend across the full length of building.

- A courtyard must be no more than one-third of the length of the building face, and in no case longer than 35 feet in width.
- A courtyard may be no more than 35 feet in depth.
- A courtyard is considered as part of the building for the purpose of measuring the build-to zone.

## 2.0. DISTRICTS

### 2.2. Rules Applicable to All Districts

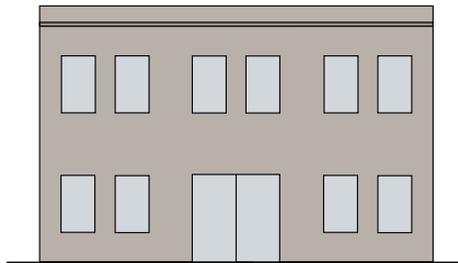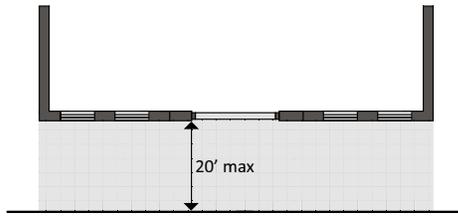

#### 7. Forecourt

An open area at grade, or within 30 inches of grade, that serves as an open space, plaza or outdoor dining area that extends across the full length of building.

- a. A forecourt may be placed in front of a building, provided that it extends no more than 20 feet in depth.
- b. A forecourt extends the depth of the build-to zone in an amount equal to the courtyard depth.
- c. A forecourt of at least 10 feet in depth satisfies the building setback requirement above the second floor (where applicable).
- d. A forecourt may extend the entire width of the lot.
- e. A forecourt may also be located internal to the lot, adjacent to one or more sides of the building.

## 2.0. DISTRICTS

### 2.3. HR-1: Core



#### PURPOSE AND INTENT



The HR-1: Core sub-district is intended to preserve existing buildings and to maintain the historic character of the two traditional centers on Haywood Road. Existing buildings should be reused where possible and new infill buildings should respect the existing form and context. Height requirements are set to ensure that existing buildings can compete successfully with new infill buildings. Buildings in the HR-1: Core sub-district are pulled up to the sidewalk to encourage pedestrian activity in the area. Mixed use is encouraged, and a variety of commercial uses are allowed on the ground floor. Residential and office uses are allowed in upper floors.





STREET CROSS-SECTION



Width	
Ⓐ Pavement width	44'
Ⓑ Crossing distance	28'
Streetscape	
Ⓒ Sidewalk (min)	8'
Ⓓ Parking lane/bump-out	8'
Travelway	
Ⓔ Travel lane with sharrow	14'


Specifications	
Walkway type	Sidewalk
Planting type	Trees in bump-outs
Parking type	Parallel
Bike lane type	Shared

# 2.0. DISTRICTS

## 2.3. HR-1: Core




### 1. LOT CRITERIA

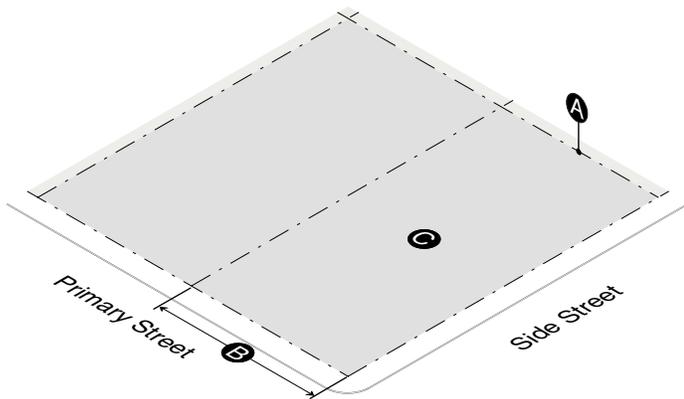

Lot Dimensions	
A Lot area (min)	0'
B Lot width (min)	0'
Lot Parameters	
C Building coverage (max)	100%
D Outdoor amenity space (min)	0%

### 2. SITING

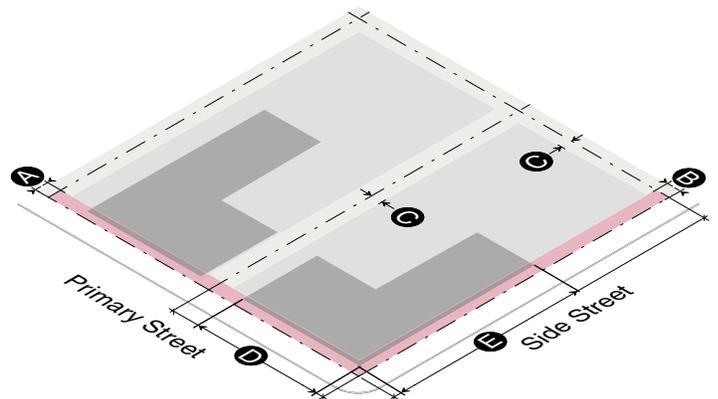


Building Setbacks	
A Primary street (min/max)	0'/5'
B Side street (min/max)	0'/5'
C Rear or side interior (min)	0'
Rear or side interior abutting RS, RM (min)	15'
Rear or side abutting alley (min)	5'
Build-to Zone (BTZ)	
D Building facade in primary street BTZ (min % of lot width)	90%
E Building facade in side street BTZ (min % of lot width)	45%
Parking Location	
No on-site parking between building and street	

## 2.0. DISTRICTS


### 2.3 .HR-1: Core



#### 3. HEIGHT

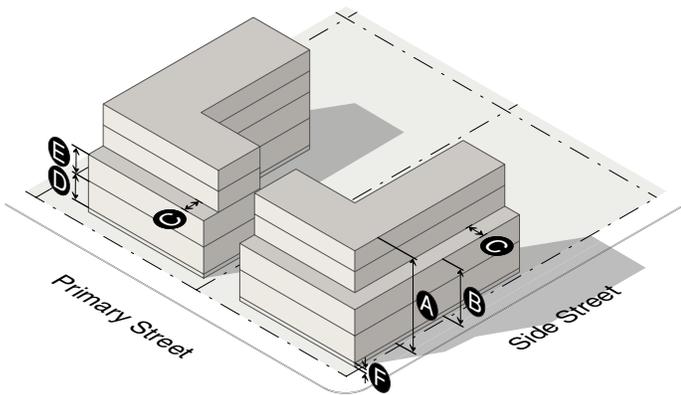

#### 4. ACTIVATION

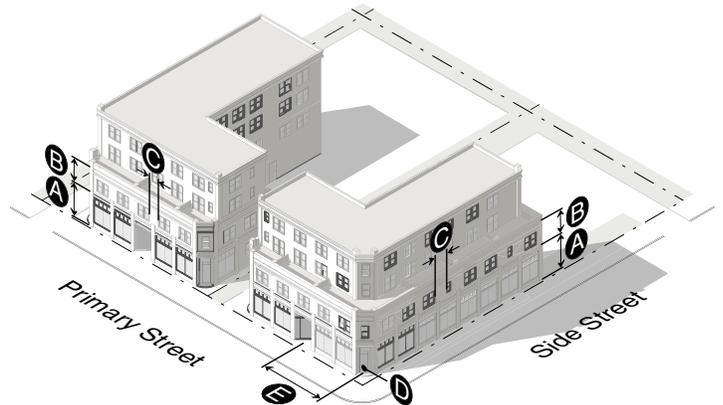

##### Building Height

**A** Building height, max. stories/max.feet 4/55'

**B** Building height, min. stories/max. ft. 2/30'

Reduced height may be required when abutting a RS or RM district (see Sec. 2.2.O)

**C** Building stepback above 2nd story (min) 10'

For sites with a contributing structure in a National Register District (or one that is eligible for historic designation) and the first 10 feet of the street-facing facade of the structure is retained and incorporated into the new development, the stepback may take place at either the first or second story.

##### Story Height

**D** Ground story height (min) 12'

**E** Upper story height (min) 9'

##### Ground Floor Elevation

**F** Ground floor elevation (min/max) 0'/2'

##### Transparency

**A** Ground story, primary/side (min) 60%/30%

**B** Upper story (min) 20%

**C** Blank wall area, primary/side (max) 15'/30'

A minimum of 70% of the street-fronting, street-level window pane surface area must allow views into the ground story use for a depth of at least 8 feet. Windows cannot be made opaque by window treatments (except operable sunscreen devices within the conditioned space).

##### Pedestrian Access

**D** Entrance facing primary street Required

**E** Entrance spacing along primary street (max) 50'

##### Building Elements Allowed

Awning/canopy, balcony, forecourt, courtyard



PURPOSE AND INTENT



The HR-2: Expansion sub-district is intended to extend the urban character of the Core. New buildings are encouraged in this sub-district. Since the majority of this area can be expected to redevelop, new buildings are allowed to be taller than in the Core. Mixed-use buildings in the HR-2: Expansion sub-district are pulled up to the sidewalk to encourage pedestrian activity in the area. Residential buildings are set slightly further back from the street. Mixed use is encouraged, and a variety of commercial uses are allowed on the ground floor. Residential and office uses are allowed in upper floors of mixed use buildings, and a totally residential building is also allowed.



## 2.0. DISTRICTS

### 2.4. HR-2: Expansion

#### STREET CROSS-SECTION



Width	
Ⓐ Pavement width	49'
Ⓑ Crossing distance	33'
Streetscape	
Ⓒ Sidewalk (min)	10'
Ⓓ Parking lane/bump-out	8'
Travelway	
Ⓔ Bike lane	5'
Ⓕ Travel lane	11.5'


Specifications	
Walkway type	Sidewalk
Planting type	Trees in grates or bump-outs
Parking type	Parallel
Bike lane type	Striped lane

# 2.0. DISTRICTS

## 2.4. HR-2: Expansion




### 1. LOT CRITERIA

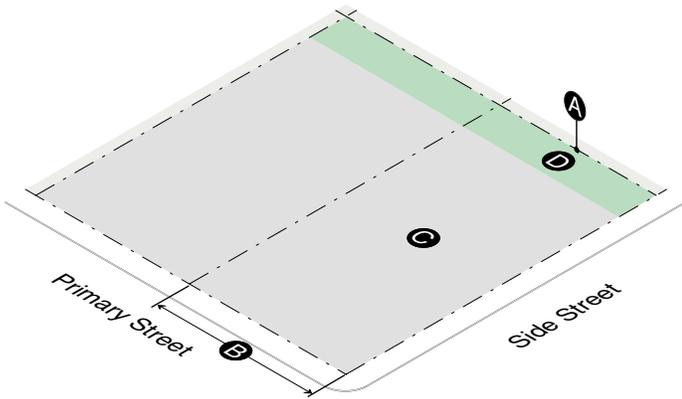

Lot Dimensions	
Ⓐ Lot area (min)	0'
Ⓑ Lot width (min)	0'
Lot Parameters	
Ⓒ Building coverage (max)	90%
Ⓓ Outdoor amenity space (min)	10%

### 2. SITING

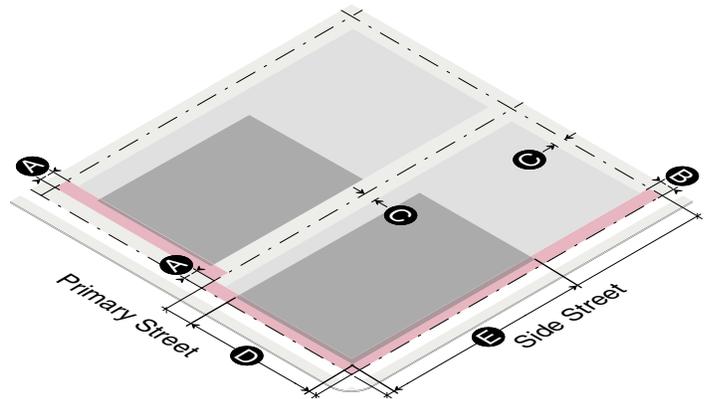


Building Setbacks	
Ⓐ Primary street (min/max)	
Residential	5'/10'
Nonresidential	0'/5'
Ⓑ Side street (min/max)	
Residential	5'/10'
Nonresidential	0'/5'
Ⓒ Rear or side interior (min)	0'
Rear or side interior abutting RS, RM (min)	15'
Rear or side abutting alley (min)	5'
Build-to Zone (BTZ)	
Ⓓ Building facade in primary street BTZ (min % of lot width)	80%
Ⓔ Building facade in side street BTZ (min % of lot width)	40%
Parking Location	
No on-site parking between building and street	
Garage doors cannot face Haywood Road	

## 2.0. DISTRICTS


### 2.4. HR-2: Expansion

#### 3. HEIGHT

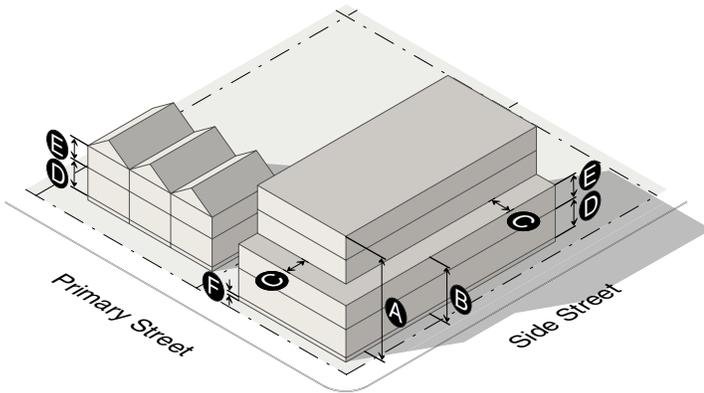

Building Height	
Ⓐ Building height, stories max./feet max.	4/55'
Ⓑ Building height, stories min./feet max.	2/30'
Reduced height may be required when abutting a RS or RM district (see Sec. 2.2.O)	
Ⓒ Building stepback above 2nd story (min)	10'
For sites with a contributing structure in a National Register District (or one that is eligible for historic designation) and the first 10 feet of the street-facing facade of the structure is retained and incorporated into the new development, the stepback may take place at either the first or second story.	
Story Height	
Ⓓ Ground story height (min)	
Residential	10'
Nonresidential	12'
Ⓔ Upper story height (min)	9'
Ground Floor Elevation	
Ⓕ Ground floor elevation (min/max)	
Residential	2'/4'
Nonresidential	0'/2'

#### 4. ACTIVATION

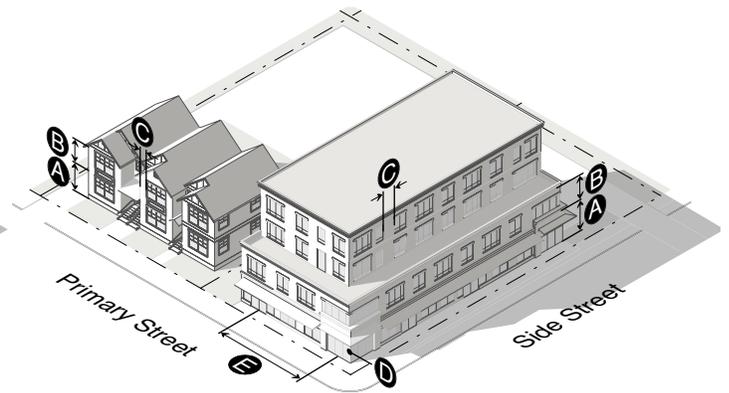

Transparency	
Ⓐ Ground story, primary/side (min)	
Residential	20%/20%
Nonresidential	60%/30%
Ⓑ Upper story (min)	20%
Ⓒ Blank wall area, primary/side (max)	
Residential	30'/30'
Nonresidential	15'/30'
Pedestrian Access	
Ⓓ Entrance facing primary street	Required
Ⓔ Entrance spacing along primary street (max)	50'
Building Elements Allowed	
Residential: awning/canopy, balcony, front porch, stoop	
Nonresidential: awning/canopy, balcony, forecourt, courtyard	



### PURPOSE AND INTENT



The HR-3: Corridor sub-district is intended to provide a green frontage along Haywood Road to provide relief from the urban areas of the Core and Expansion sub-districts. Existing buildings should be reused where possible and new infill buildings should respect the traditional form and context. Buildings in the HR-3: Corridor sub-district with active ground floors are pulled up to the sidewalk to encourage pedestrian activity in the area. Residential buildings are set slightly further back from the street, providing a green edge along Haywood Road. A variety of uses are allowed in this sub-district, with a focus on residential and office uses.





STREET CROSS-SECTION





Width	
Ⓐ Pavement width	40'
Ⓑ Crossing distance	24'
Streetscape	
Ⓒ Sidewalk (min)	8'
Ⓓ Parking lane/bump-out	8'
Travelway	
Ⓔ Travel lane with sharrow	12'

Specifications	
Walkway type	Sidewalk
Planting type	Trees in bump-outs or residential front yards
Parking type	Parallel
Bike lane type	Shared



1. LOT CRITERIA

2. SITING

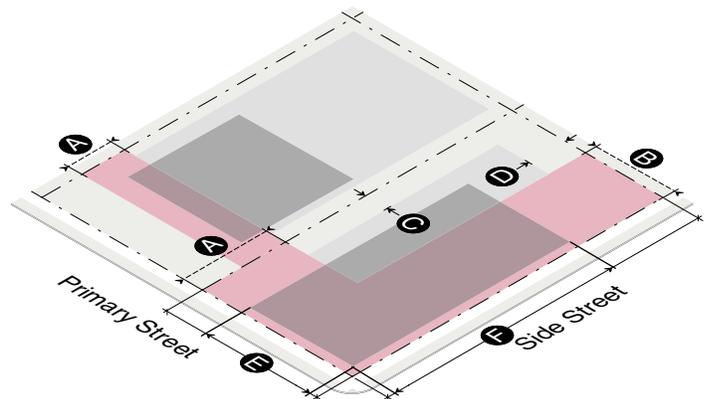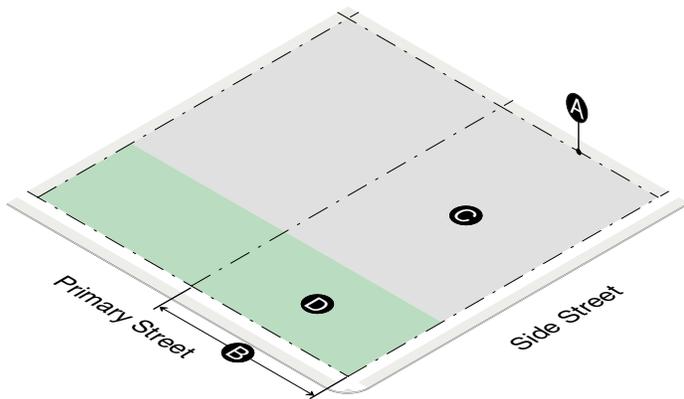



Lot Dimensions	
Ⓐ Lot area (min)	0'
Ⓑ Lot width (min)	0'
Lot Parameters	
Ⓒ Building coverage (max)	70%
Ⓓ Outdoor amenity space (min)	30%

Building Setbacks	
Ⓐ Primary street (min/max)	
Residential	15'/30'
Nonresidential	0'/30'
Ⓑ Side street (min/max)	
Residential	10'/30'
Nonresidential	0'/30'
Ⓒ Side interior (min)	10'
Side interior, abutting RS, RM (min)	15'
Ⓓ Rear (min)	15'
Rear or side abutting alley (min)	5'
Build-to Zone (BTZ)	
Ⓔ Building facade in primary street BTZ (min % of lot width)	60%
Ⓕ Building facade in side street BTZ (min % of lot width)	30%
Parking Location	
No on-site parking between building and street	
Garage doors cannot face Haywood Road	



3. HEIGHT

4. ACTIVATION

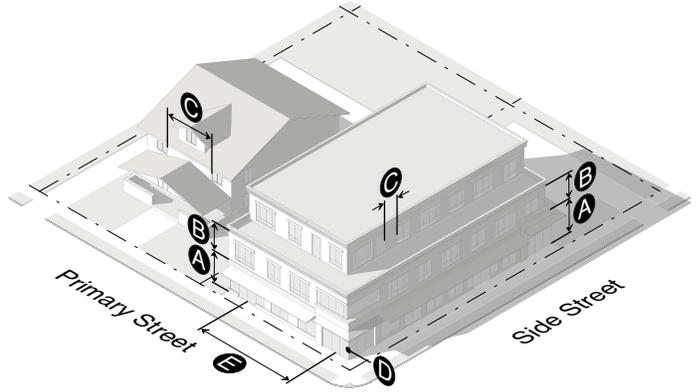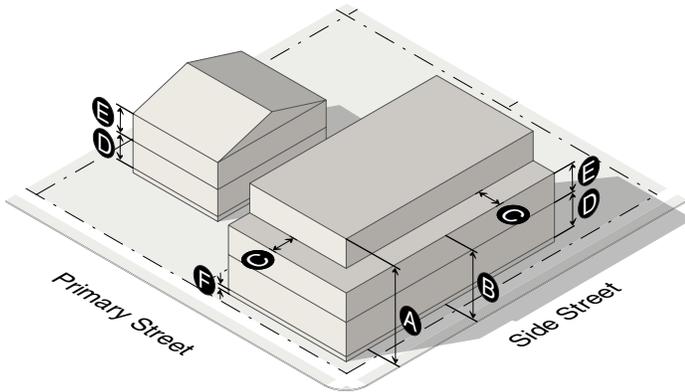

Building Height		
A	Building height, stories max./feet max.	3/45'
B	Building height, stories min./feet max.	2/30'
C	Building setback above 2nd story (min)	
	10' or less from front property line	10'
	Over 10' from front property line	Not required
Story Height		
D	Ground story height (min)	10'
E	Upper story height (min)	9'
Ground Floor Elevation		
F	Ground floor elevation (min/max)	
	Residential	2'/4'
	Nonresidential	0'/4'

Transparency		
A	Ground story, primary/side (min)	
	Facade ≤ 15' from ROW line	40%/20%
	Facade > 15' from ROW line	20%/20%
B	Upper story (min)	20%
C	Blank wall area, primary/side (max)	
	Facade ≤ 15' from ROW line	15'/30'
	Facade > 15' from ROW line	30'/30'
Pedestrian Access		
D	Entrance facing primary street	Required
E	Entrance spacing along primary street (max)	50'
Building Elements Allowed		
	Awning/canopy, balcony, front porch, stoop	



### PURPOSE AND INTENT



The HR-4: Traditional sub-district is intended to preserve existing buildings and to expand the historic character this center on Haywood Road. Existing buildings should be reused where possible and new infill buildings should respect the traditional form and context. Height requirements are set to ensure that existing buildings can compete successfully with new infill buildings. Buildings in the HR-4: Traditional sub-district are pulled up to the sidewalk to encourage pedestrian activity in the area. Mixed use is encouraged, and a variety of commercial uses are allowed on the ground floor. Residential and office uses are allowed in upper floors of mixed use buildings, and a totally residential building is also allowed.





STREET CROSS-SECTION



Width	
Ⓐ Pavement width	29'
Ⓐ Crossing distance	29'
Streetscape	
Ⓑ Sidewalk (min)	6'
Travelway	
Ⓒ Bike lane (one side uphill)	5'
Ⓓ Travel lane	12'


Specifications	
Walkway type	Sidewalk
Planting type	--
Parking type	--
Bike lane type	Striped lane

# 2.0. DISTRICTS

## 2.6. HR-4: Traditional




### 1. LOT CRITERIA

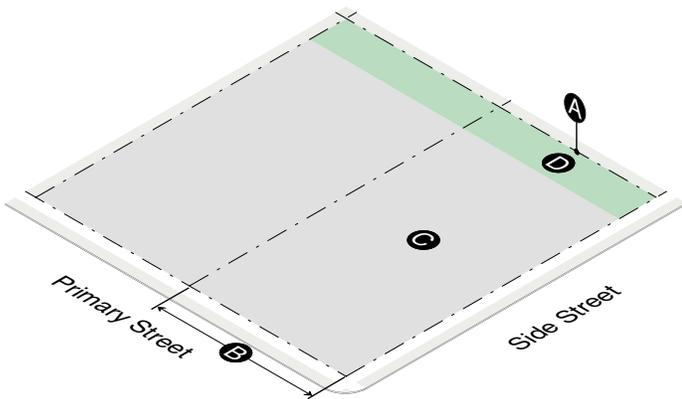

Lot Dimensions	
Ⓐ Lot area (min)	0'
Ⓑ Lot width (min)	0'
Lot Parameters	
Ⓒ Building coverage (max)	90%
Ⓓ Outdoor amenity space (min)	10%


### 2. SITING

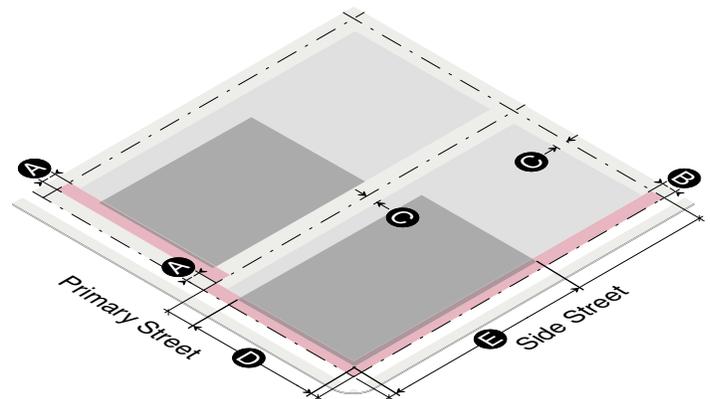

Building Setbacks	
Ⓐ Primary street (min/max)	
Residential	5'/10'
Nonresidential	0'/5'
Ⓑ Side street (min/max)	
Residential	5'/10'
Nonresidential	0'/5'
Ⓒ Rear or side interior (min)	0'
Rear or side interior abutting RS, RM (min)	15'
Rear or side abutting alley (min)	5'
Build-to Zone (BTZ)	
Ⓓ Building facade in primary street BTZ (min % of lot width)	70%
Ⓔ Building facade in side street BTZ (min % of lot width)	35%
Parking Location	
Off-street only	
No on-site parking between building and street	
Garage doors cannot face Haywood Road	




### 3. HEIGHT

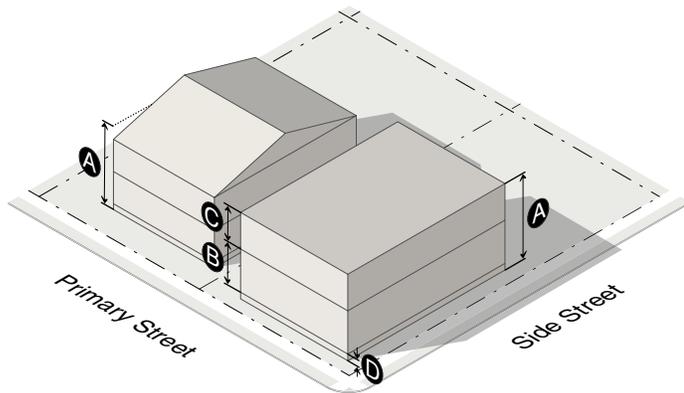

Building Height	
Ⓐ Building height, stories min./feet max.	2/35'
Story Height	
Ⓑ Ground story height (min)	
Residential	10'
Nonresidential	12'
Ⓒ Upper story height (min)	9'
Ground Floor Elevation	
Ⓓ Ground floor elevation (min/max)	
Residential	2'/4'
Nonresidential	0'/2'

### 4. ACTIVATION

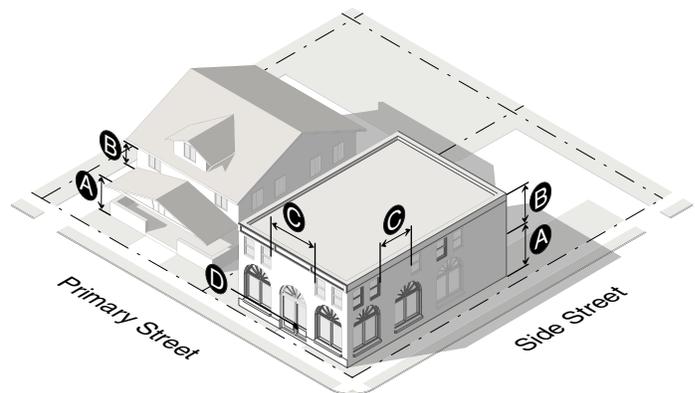


Transparency	
Ⓐ Ground story, primary/side (min)	
Residential	20%/20%
Nonresidential	60%/30%
Ⓑ Upper story (min)	20%
Ⓒ Blank wall area, primary/side (max)	
Residential	30'/30'
Nonresidential	15'/30'
Pedestrian Access	
Ⓓ Entrance facing primary street	Required
Ⓔ Entrance spacing along primary street (max)	50'
Building Elements Allowed	
Residential: awning/canopy, balcony, front porch, stoop	
Nonresidential: awning/canopy, balcony, forecourt, courtyard	



PURPOSE AND INTENT



The HR-5: Live-Work sub-district is intended for new residential or live-work buildings that address and conform to the steep topography of the area. Live-work buildings in the HR-5: Live-Work sub-district are pulled up to the sidewalk to encourage pedestrian activity in the area. Residential buildings are set slightly further back from the street. A variety of live-work and residential uses are allowed in this sub-district.

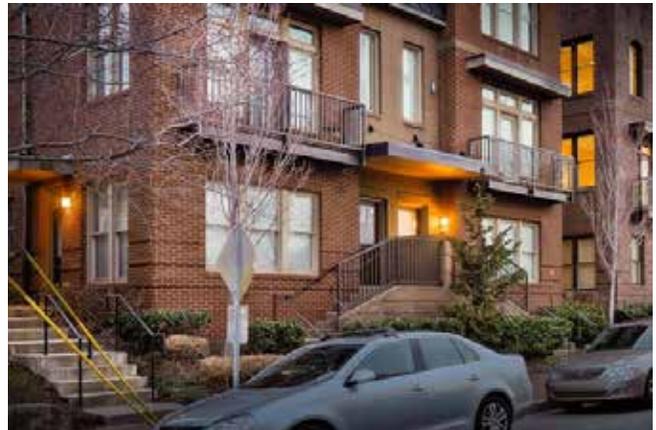

STREET CROSS-SECTION





Width	
Ⓐ Pavement width	29'
Ⓐ Crossing distance	29'
Streetscape	
Ⓑ Sidewalk (min)	6'
Ⓒ Planting area	5'
Travelway	
Ⓓ Bike lane (one side uphill)	5'
Ⓔ Travel lane	12'

Specifications	
Walkway type	Sidewalk
Planting type	Trees in verge or residential front yards
Parking type	--
Bike lane type	Striped lane



1. LOT CRITERIA

2. SITING

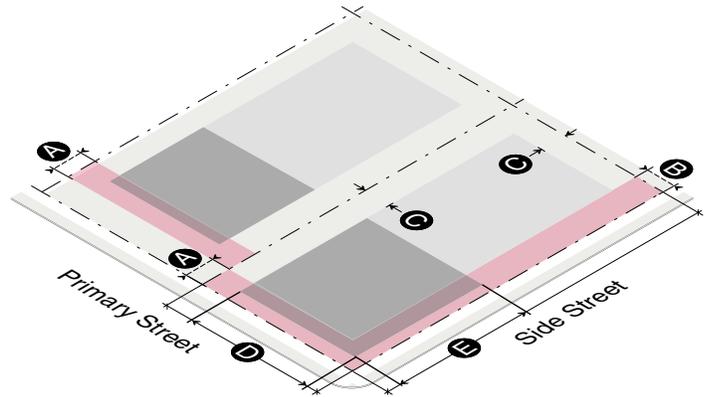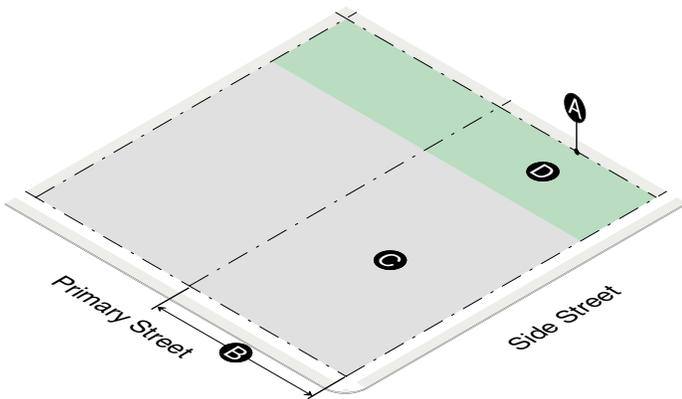

Lot Dimensions	
Ⓐ Lot area (min)	0'
Ⓑ Lot width (min)	0'
Lot Parameters	
Ⓒ Building coverage (max)	80%
Ⓓ Outdoor amenity space (min)	20%


Building Setbacks	
Ⓐ Primary street (min/max)	
Residential	10'/20'
Live-work	0'/10'
Ⓑ Side street (min)	
Residential	10'
Live-work	0'
Ⓒ Rear or side interior (min)	0'
Rear or side abutting alley (min)	5'

Build-to Zone (BTZ)	
Ⓓ Building facade in primary street BTZ (min % of lot width)	70%
Ⓔ Building facade in side street BTZ (min % of lot width)	35%


Parking Location	
Off-street only	
No on-site parking between building and street	
Garage doors cannot face Haywood Road	



3. HEIGHT

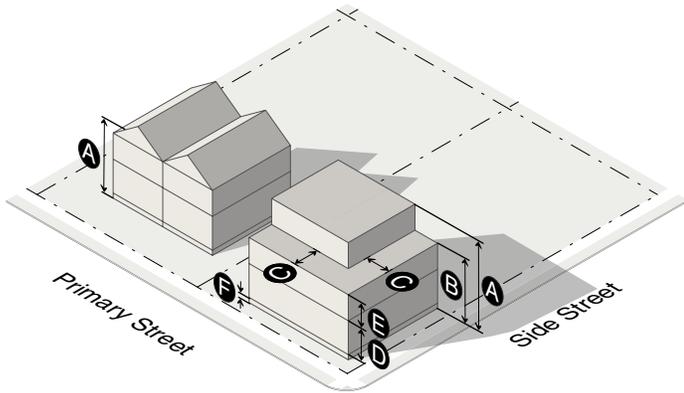

4. ACTIVATION

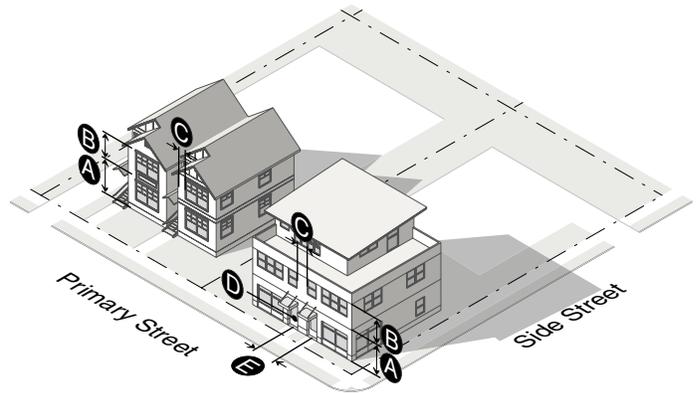

Building Height		
<b>A</b>	Building height, stories max/feet max	3/45'
<b>B</b>	Building height, stories min/feet max	2/30'
<b>C</b>	Building setback above 2nd story (min)	
	10' or less from front property line	10'
	Over 10' from front property line	Not required
Story Height		
<b>D</b>	Ground story height (min)	
	Residential	10'
	Live-work	12'
<b>E</b>	Upper story height (min)	9'
Ground Floor Elevation		
<b>F</b>	Ground floor elevation (min/max)	
	Residential	0'/8'
	Live-work	0'/4'

Transparency		
<b>A</b>	Ground story, primary (min)	
	Residential	20%
	Live-work	40%
<b>B</b>	Upper story (min)	20%
<b>C</b>	Blank wall area, primary (max)	
	Residential	30'
	Live-work	15'
Pedestrian Access		
<b>D</b>	Entrance facing primary street	Required
<b>E</b>	Entrance spacing along primary street (max)	50'
Building Elements Allowed		
	Residential: awning/canopy, balcony, front porch, stoop	
	Live-work: awning/canopy, balcony, front porch, stoop, courtyard	



### PURPOSE AND INTENT




The HR-6: Town sub-district is intended to provide a new center of activity where Haywood Road meets Patton Avenue. Redevelopment with new, taller buildings is encouraged in this sub-district in order to take advantage of the spectacular views afforded by this hilltop location. Mixed-use buildings in the HR-6: Town sub-district are pulled up to the sidewalk along Haywood Road to encourage pedestrian activity in the area. Buildings along Patton Avenue may be pulled back to allow limited parking between the building and the street. Mixed use is encouraged, and a variety of commercial uses are allowed on the ground floor. Residential and office uses are allowed in upper floors of mixed use buildings.





STREET CROSS-SECTION




Width	
Ⓐ Pavement width	30'
Ⓐ Crossing distance	30'
Streetscape	
Ⓑ Sidewalk (min)	8'
Ⓒ Planting area	5'
Travelway	
Ⓓ Bike lane	5'
Ⓔ Travel lane	10'

Specifications	
Walkway type	Sidewalk
Planting type	Trees in grates or bump-outs
Parking type	--
Bike lane type	Striped lane




1. LOT CRITERIA

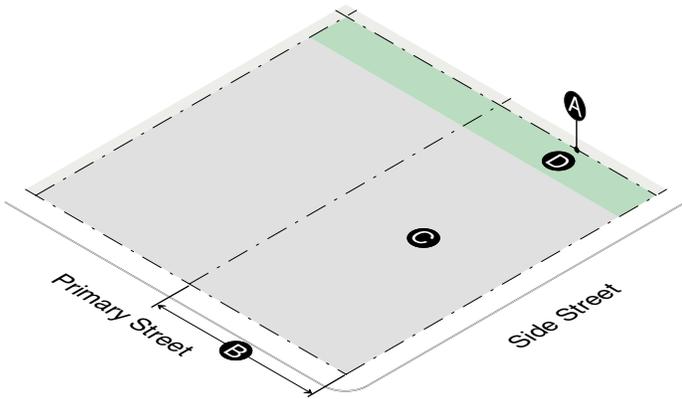

Lot Dimensions	
A Lot area (min)	0'
B Lot width (min)	0'
Lot Parameters	
C Building coverage (max)	80%
D Outdoor amenity space (min)	20%

2. SITING


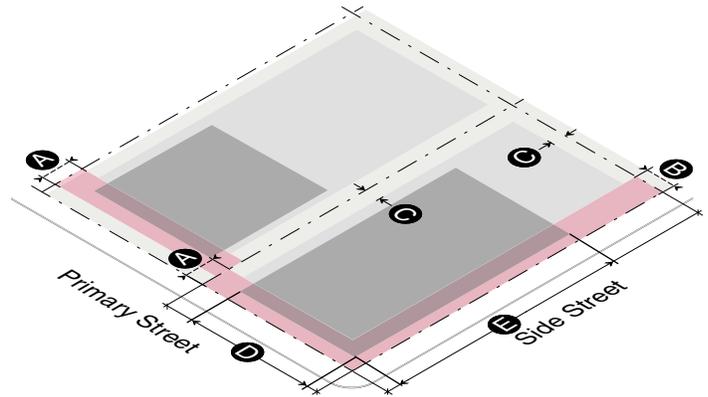


Building Setbacks	
A Primary street (min/max)	
Residential	5'/15'
Nonresidential	0'/10'
Patton Avenue exemption	0'/85'
B Side street (min/max)	
Residential	5'/15'
Nonresidential	0'/10'
C Rear or side interior (min)	0'
Rear or side interior abutting RS, RM (min)	15'
Rear or side abutting alley (min)	5'
Build-to Zone (BTZ)	
D Building facade in primary street BTZ (min % of lot width)	80%
E Building facade in side street BTZ (min % of lot width)	40%
Parking Location	
No on-site parking between building and street, except on Patton Avenue, where max. 2 bays of on-site parking with single drive aisle is allowed	
Garage doors cannot face Haywood Road	



3. HEIGHT

4. ACTIVATION

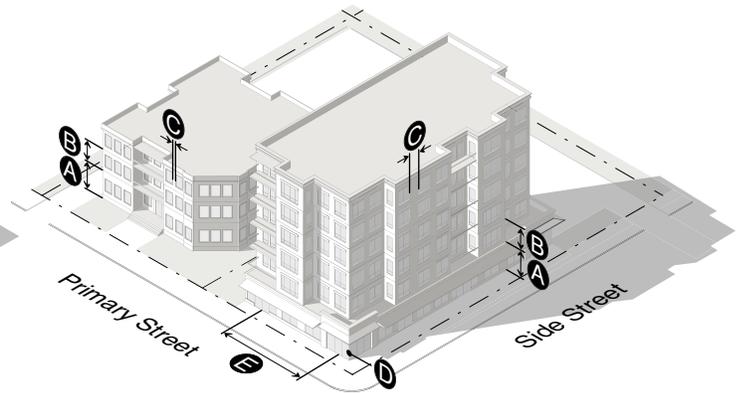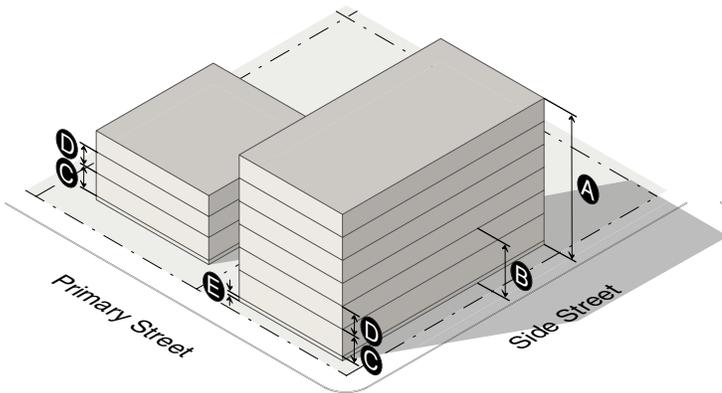

Building Height	
A Building height, stories max./feet max.	6/80'
B Building height, stories min./feet max.	2/30'
Reduced height may be required when abutting a RS or RM district (see Sec. 2.2.O)	
Story Height	
C Ground story height (min)	
Residential	10'
Nonresidential	12'
D Upper story height (min)	9'
Ground Floor Elevation	
E Ground floor elevation (min/max)	
Residential	2'/4'
Nonresidential	0'/2'

Transparency	
A Ground story, primary/side (min)	
Residential	20%/20%
Nonresidential	60%/30%
B Upper story (min)	20%
C Blank wall area, primary/side (max)	
Residential	30'/30'
Nonresidential	15'/30'
Pedestrian Access	
D Entrance facing primary street	Required
E Entrance spacing along primary street (max)	50'
Building Elements Allowed	
Residential: awning/canopy, balcony, front porch, stoop	
Nonresidential: awning/canopy, balcony, gallery, forecourt, courtyard	

## 3.0. LAND USE

### 3.1. Classification of Uses

This section establishes the uses allowed. A lot or building must be occupied with only the uses allowed in this section. Any one or more allowed uses may be established on a lot, subject to the requirements of this section, and in compliance with all applicable requirements of this Haywood Road Form District.

#### A. Principal Uses

1. Allowed principal uses by sub-district are shown in the permitted use table in Sec. 3.2.
2. Any use not listed is not allowed unless the Planning and Development Director determines that the use is similar to a listed use. Prohibited uses found in the Table of Uses in 7-8-1d of this chapter also apply to the Haywood Road Form District.
3. When determining whether a proposed use is similar to a listed use, the Planning and Development Director will consider the following:
  - a. The actual or projected characteristics of the proposed use.
  - b. The relative amount of site area or floor area and equipment devoted to the proposed use.
  - c. Relative amounts of sales.
  - d. The customer type.
  - e. The relative number of employees.
  - f. Hours of operation.
  - g. Building and site arrangement.
  - h. Types of vehicles used and their parking requirements.
  - i. The number of vehicle trips generated.
  - j. How the proposed use is advertised.
  - k. The likely impact on surrounding properties.
  - l. Whether the activity is likely to be found independent of the other activities on the site.

4. Where a use is determined not to be similar to any listed use, a text amendment is required prior to establishment of that use.

#### B. Accessory Uses

1. Accessory uses and structures are permitted in conjunction with an allowed principal use. Accessory uses and structures must be accessory and clearly and customarily incidental and subordinate to a permitted principal use or structure.
2. No accessory use or structure may be established prior to the establishment of a permitted principal use or structure.
3. All accessory structures must meet the requirements of Sec. 2.0.
4. The Planning and Development Director is authorized to determine when a use or structure is accessory. In order to classify a use or structure as accessory, the Planning and Development Director must determine that the use or structure:
  - a. Is subordinate to the principal use in terms of area, extent and purpose;
  - b. Contributes to the comfort, convenience or necessity of occupants of the principal use or structure served;
  - c. Is located on the same lot as the principal use or structure, or on a contiguous lot in the same ownership;
  - d. Does not involve operations not in keeping with the character of the principal use or structure served; and
  - e. Is not of a nature likely to attract visitors in larger numbers than would normally be expected for the principal use or structure.

# 3.0. LAND USE

## 3.2. Permitted Use Table

	Core HR-1	Expansion HR-2	Corridor HR-3	Traditional HR-4	Live-Work HR-5	Town HR-6	Special Standards
<b>Residential</b>							
Dwelling, single family detached	--	--	P	--	P		
Dwelling, townhouse	--	P	P	P	P	P	
Dwelling, multifamily	--	P	P	P	P	P	
Dwelling, upper-story	P	P	P	P	P	P	
Assisted living facility	--	P	P	P	--	P	
Dormitory	--	P	P	P	--	P	
Group home	--	P	P	P	--	P	
<b>Public and Institutional</b>							
Civic, social service or fraternal organizations	--	P	P	P	--	P	
College, university, vocational or technical school	--	P	P	P	--	P	
Community center	--	P	P	P	P	P	
Day-care center, adult or child	P	P	P	P	--	P	
Fire or police station	P	P	P	P	P	P	
Government building and use	P	P	P	P	--	P	
Library, museum	P	P	P	P	--	P	
Park, playground, greenway	P	P	P	P	P	P	
Performance center	P	P	P	P	--	P	
Place of worship	P	P	P	P	P	P	
Post office without distribution facility	P	P	P	P	--	P	
Public utility and related facility	P	P	P	P	P	P	
School	P	P	P	P	P	P	
<b>Food, Beverage and Entertainment</b>							
Eating/drinking establishment	P	P	P	P	--	P	
Eating/drinking establishment with drive-through	--	--	--	--	--	S	Sec. 3.3.A
Microbrewery	P	P	P	P	--	P	
Movie theater	P	P	P	P	--	P	
Nightclub	P	P	P	P	--	P	
Recreational uses, commercial indoor	P	P	P	P	--	P	

KEY: P = Permitted Use S= Permitted Use Subject to Special Standards C = Conditional Use -- = Use Not Permitted

# 3.0. LAND USE

## 3.2. Permitted Use Table

	Core HR-1	Expansion HR-2	Corridor HR-3	Traditional HR-4	Live-Work HR-5	Town HR-6	Special Standards
<b>Lodging</b>							
Bed and breakfast inn	--	P	P	P	S	P	§ 7-16-1(c)(10)
Boarding house	--	P	P	P	--	P	
Homestay	--	P	P	P	S	P	§ 7-16-1(c)(9)
Lodging facility	P	P	P	P	--	P	
<b>Retail, Service and Office</b>							
Art gallery	P	P	P	P	S	P	Sec. 3.3.B
Barber shop or beauty salon	P	P	P	P	S	P	Sec. 3.3.B
Business incubator	P	P	P	P	S	P	Sec. 3.3.B
Clinic, medical	P	P	P	P	--	P	
Clinic, veterinary	P	P	P	P	--	P	
Farm products market, flea market	P	P	P	P	--	P	
Financial Institution	P	P	P	P	--	P	
Financial Institution with drive-through	--	--	S	--	--	S	Sec. 3.3.A
Funeral establishment	S	S	S	S	--	S	§ 7-16-1(c)(33)
Gasoline sales	--	--	C	--	--	C	
Grocery store	P	P	P	P	--	P	
Hardware, garden supply store	P	P	P	P	--	P	
Health or fitness facility	P	P	P	P	--	P	
Hospital or medical center	--	P	P	P	--	P	
Instructional services	P	P	P	P	--	P	
Laundry or dry cleaning	P	P	P	P	--	P	
Laundry or dry cleaning with drive-through	--	--	--	--	--	P	Sec. 3.3.A
Motor vehicle or boat service and repair	--	P	P	P	--	--	
Motor vehicle service facility	--	P	P	P	--	P	
Office	P	P	P	P	S	P	Sec. 3.3.B
Pharmacy	P	P	P	P	--	P	
Pharmacy with drive-through	--	--	S	--	--	S	Sec. 3.3.A
Plant sales, nursery, greenhouse	P	P	P	P	--	P	
Print and publishing	P	P	P	P	S	P	Sec. 3.3.B
Research & technology production uses	P	P	P	P	--	P	
Retail sales	P	P	P	P	S	P	Sec. 3.3.B

KEY: P = Permitted Use S= Permitted Use Subject to Special Standards C = Conditional Use -- = Use Not Permitted

### 3.0. LAND USE

#### 3.2. Permitted Use Table

	Core HR-1	Expansion HR-2	Corridor HR-3	Traditional HR-4	Live-Work HR-5	Town HR-6	Special Standards
Small engine service and repair	--	P	P	P	--	--	
Studio, gallery or workshop for arts and crafts, low impact	P	P	P	P	S	P	Sec. 3.3.B
Studio, gallery or workshop for arts and crafts, high impact	P	P	P	P	--	P	
Tailor or dressmaker	P	P	P	P	--	P	
Tattoo parlor	P	P	P	P	--	P	
<b>Other Use Types</b>							
Agriculture	S	S	S	S	S	S	§ 7-16-1(c)(4.1)
Light industrial	P	P	P	P	--	P	
Live work units	S	S	S	S	S	S	Sec. 3.3.B
Parking deck, garage, structure	S	S	S	S	S	S	Sec. 3.3.C
Telecommunication tower	C	C	C	C	C	C	
Telecommunication tower/support structure concealed	C	C	C	C	C	C	
Wireless telecommunication facility, microcell	S	S	S	S	S	S	§ 7-16-1(c)(75)
Wireless telecommunication facility, co-location	S	S	S	S	S	S	§ 7-16-1(c)(77)
Wireless telecommunication facility, (concealed)	S	S	S	S	S	S	§ 7-16-1(c)(76)

KEY: P = Permitted Use S= Permitted Use Subject to Special Standards C = Conditional Use -- = Use Not Permitted

## 3.0. LAND USE

### 3.3. Special Standards

#### A. Drive-Through Facility

1. Adequate space must be made available on-site for the stacking, storage and queuing of vehicles.
2. Vehicles using drive-through facilities may not encroach on or interfere with the public use of streets and sidewalks by vehicles or pedestrians.
3. All drive-through areas, including but not limited to menu boards, stacking lanes, trash receptacles, ordering box, drive up windows, and other objects associated with the drive-through area, must be located to the side or rear of the building. Drive-through windows and lanes may not be placed between the street and the associated building.
4. A restaurant with a drive-through must provide at least 4 queuing spaces, measured from the first pick-up window.
5. A bank or pharmacy with a drive-through must provide at least 3 queuing spaces per drive-through lane, measured from the teller box or window.
6. All other uses determined by the City Traffic Engineer.

#### B. Live-Work

1. In a mixed-use building containing live-work units, at a minimum, the ground floor primary street-facing facade must be activated with permitted commercial uses. This does not preclude other commercial spaces being included in additional locations in the building.
2. The live-work unit cannot exceed 1,500 square feet in gross floor area.

#### C. Parking Structures

1. Parking structures must meet all the requirements for a principal structure as specified in Sec. 2.0. In no case can structured parking exceed the height of the principal building on the site.
2. The ground story of a structured parking garage facing Haywood Road or Patton Avenue must have active uses (such as, but not limited to, residential, commercial, office or civic space, where permitted) located between the parking structure and the street (not including an alley).
3. Where upper stories of structured parking are at the perimeter of a building, they must be screened so that cars are not visible from ground level view from adjacent property or adjacent public street right-of-way (not including an alley).
4. Architectural and vegetative screens must be used to articulate the facade, hide parked vehicles and shield lighting. In addition, any ground floor facade treatment (building materials, windows, and architectural detailing) must be continued on upper stories.
5. Parking structure entries must not exceed 16 feet clear height and 25 feet clear width.

## 4.0. SITE DEVELOPMENT

### 4.1. Parking

#### A. Applicability

The parking requirements of § 7-11-2 apply in the Haywood Road Form District, except the sections identified below:

1. § 7-11-2(c). Off-Street Parking Requirements;
2. § 7-11-2(d), Off-Street Loading Requirements; and
3. § 7-11-2(e)(2), Remote Parking.

#### B. Required Parking

The following minimum vehicle and bicycle parking spaces are required.

Use	Vehicle Parking Spaces (min)			Bicycle Parking (min)	
	HR-1: Core HR-2: Expansion	HR-3 Corridor HR-4: Traditional HR-6: Town	HR-5: Live- Work	Spaces	Short-term/ Long term
Existing Building					
Eating/drinking establishment, microbrewery, nightclub	1 per 250 sf	same as new building	same as new building	same as new building	same as new building
All other uses	none	same as new building	same as new building	same as new building	same as new building
New Building or Addition					
Dwelling, multifamily or upper-story	1 per unit (upper story only)	1 per unit	1 per unit	.5 per unit up to 2 bedrooms plus .25 per additional bedroom	80%/20%
All other residential uses	1 per unit	1 per unit	1 per unit	none	--
Park, playground, greenway, fire or police station, public utility or related facility	none	none	none	none	--
Place of worship	greater of 1 per 4 seats or 1 per 40 sf	greater of 1 per 4 seats or 1 per 40 sf	greater of 1 per 4 seats or 1 per 40 sf	1 per 5,000 sf 2 min	90%/10%
All other public and institutional uses	1 per 500 sf	1 per 500 sf	1 per 500 sf	1 per 5,000 sf 2 min	90%/10%
All food, beverage and entertainment uses	1 per 250 sf	1 per 250 sf	--	1 per 2,500 sf 2 min	80%/20%
All lodging uses	1 per guest room	1 per guest room	1 per guest room	1 per 2,500 SF 2 min	80%/20%
Health and fitness facility	1 per 250 sf	1 per 250 sf	1 per 250 sf	1/2,500 SF 2 min	80%/20%
All other retail, service and office uses	1 per 500 sf	1 per 500 sf	1 per 500 sf	1/2,500 SF 2 min	80%/20%
All other uses types	none	none	none	none	--

## 4.0. SITE DEVELOPMENT

### 4.1. Parking

#### C. Location of Required Vehicle Parking

Required vehicle parking must be located on the same lot as the use they are intended to serve, except as listed below.

##### 1. On-Street Parking

See § 7-11-2.(f).

##### 2. Remote Parking

- a. All required parking spaces, except required accessible spaces, can be located off-site if the remote parking area is located within 660 feet from the primary entrance of the use served.
- b. Up to 50% of the required parking spaces may be located more than 660 feet off-site, if the parking area is located within 1,320 feet from the primary entrance of the use served.
- c. Specifically designated parking spaces for employees may be located off-site up to 2,640 feet from the primary entrance of the use served.
- d. All remote parking spaces used to meet an on-site parking requirement must be located within the boundaries of the Haywood Road Corridor District.
- e. The off-site parking area is measured in walking distance from the nearest point of the remote parking area to the primary entrance of the use served.
- f. Any remote parking spaces must be guaranteed by a written agreement between the owner of the remote parking area and the owner of the use served by the remote parking area. Change of ownership of either parcel requires a renewal of the agreement.

#### D. Location of Required Bike Parking

##### 1. General Requirements

- a. Bicycle parking spaces must be located on paved or pervious, dust-free surface with a slope no greater than 3%. Surfaces cannot be gravel, landscape stone, or wood chips.
- b. Bicycle parking spaces must be a minimum of 2 feet by 6 feet. There must be an access aisle a minimum of 5 feet in width.
- c. Each required bicycle parking space must be accessible without moving another bicycle and its placement must not result in a bicycle obstructing a required walkway.
- d. Up to 25% of bicycle parking may be structured parking, vertical parking or wall mount parking, provided there is a 5 foot access aisle for wall mount parking.
- e. All racks must accommodate cable locks and "U" locks and must permit the locking of the bicycle frame and one wheel to the rack and must support a bicycle in a stable position.

##### 2. Short-Term Bicycle Parking

Required short-term bicycle parking spaces must be located in a convenient and visible area at least as close as the closest non-accessible vehicle parking and within 100 feet.

##### 3. Long-Term Bicycle Parking

- a. Required long-term bicycle parking spaces must be located in enclosed and secured or supervised areas providing protection from theft, vandalism and weather and must be accessible to intended users.

## 4.0. SITE DEVELOPMENT

### 4.1. Parking

- b. Required long-term bicycle parking for residential uses can not be located within dwelling units or within deck, patio areas, or private storage areas accessory to dwelling units.
  - c. With permission of the Planning and Development Director, long-term bicycle parking spaces for nonresidential uses may be located off-site within 300 feet of the site.
  - d. The off-site parking area is measured in walking distance from the nearest point of the remote parking area to the closest primary entrance of the use served.
- b. The loading area must be located to the side or rear of buildings. Loading areas may not be placed between the street and the associated building.

#### E. Required Vehicle Loading

##### 1. General Provisions

- a. Loading and unloading activities may not encroach on or interfere with the use of sidewalks, drive aisles, queuing areas and parking areas by vehicles or pedestrians.
- b. With the exception of areas specifically designated by the City, loading and unloading activities are not permitted in the public right-of-way.
- c. If determined necessary by the Planning and Development Director, adequate space must be made available on-site for the unloading and loading of goods, materials, items or stock for delivery and shipping.

##### 2. Location

If a loading area is required or provided, it must meet the following.

- a. The loading area must be located on the same lot occupied by the use served and must be accessible from a public street or alley.


## 4.0. SITE DEVELOPMENT

### 4.2. Landscaping and Screening

#### A. Applicability

The landscape and buffering requirements of § 7-11-3 apply in the Haywood Road Form District, except as identified below:

1. The Haywood Road Form District is exempt from § 7-11-3(d)(5), Building Impact Landscaping and § 7-11-3(d)(7), Tree Save Areas.
2. Any Haywood Road Form District may modify the street buffer requirement of § 7-11-3(d)(5) by placing a wall at a minimum height of 3 feet in place of the required shrubs.
3. When abutting a RS or RM district, the property line buffer requirements of § 7-11-3(d)(1) for a Type A Bufferyard apply, except that when a wall is used (as described below), the bufferyard may be provided as follows:

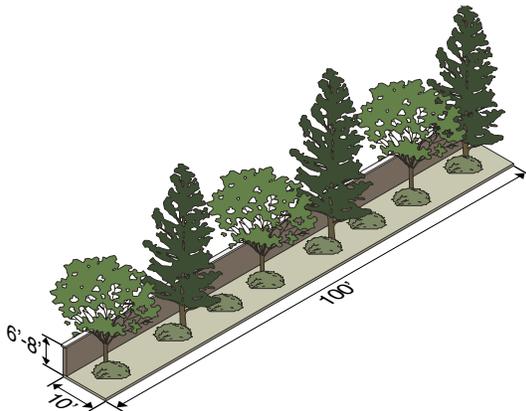

- a. Depth: 10 feet min
- b. Wall Height: 6 feet min / 8 feet max
- c. Evergreen Trees: 3
- d. Deciduous Trees (large): 3
- e. Shrubs (large): 8

#### B. Grading

1. Speculative grading of land is not permitted within the Haywood Road Form District. No grading or removal of vegetation is permitted prior to approval of a site development plan.
2. Natural slopes in excess of 45 degrees must not be graded, and existing vegetation must not be removed.

## 4.0. SITE DEVELOPMENT

### 4.3. Signs

#### A. Applicability

The sign requirements of Article XIII apply in the Haywood Road Form District, except as identified below:

1. § 7-13-4(a)(8)(a). See Sec. 4.3.H for temporary and permanent window sign requirements.
2. A-frame signs are permitted as temporary signs, provided they comply with the requirements of § 7-13-4(a)(8)(c).

#### B. Sign Types Allowed by District

Signs are allowed by sub-district as set forth below. Specific requirements for each sign are shown on the following pages.

	Core HR-1	Expansion HR-2	Corridor HR-3	Traditional HR-4	Live-Work HR-5	Town HR-6
Wall Sign	P	P	P	P	P	P
Awning Sign	P	P	P	P	P	P
Canopy Sign	P	P	P	P	P	P
Projecting Sign	P	P	P	P	P	P
Window Sign	P	P	P	P	P	P
Post Sign	--	<u>P</u>	P	<u>P</u>	--	P
Monument Sign	--	--	--	--	--	P*

KEY: P = Sign type allowed -- = Sign type not allowed \* = Allowed on sites with street frontage on Patton Ave

#### C. Number of Signs Allowed

##### 1. Wall Signs, Awning Signs, Canopy Signs

A maximum of two signs on a primary street (any combination of wall signs, awning signs or canopy signs) are allowed per tenant space. One additional sign is allowed on a side street.

##### 2. Projecting Signs

A maximum of one projecting sign is allowed per tenant space.

##### 3. Window Signs

The number of window signs is unlimited, provided the maximum percentage of all temporary and permanent signs covering ground story windows and doors is not exceeded.


##### 4. Post Sign, Monument Sign

- a. Where allowed, only one post sign or monument sign is allowed per street frontage, provided all signs are conforming.
- b. One additional post sign or monument sign is allowed for properties with 1,000 feet or more of street frontage. Where more than one post sign or monument sign is allowed, signs along the same street frontage must be spaced a minimum of 500 feet apart.
- c. Where a post sign is installed, only one wall, awning or canopy sign is allowed per tenant space.

## 4.0. SITE DEVELOPMENT

### 4.3. Signs

#### D. Wall Sign

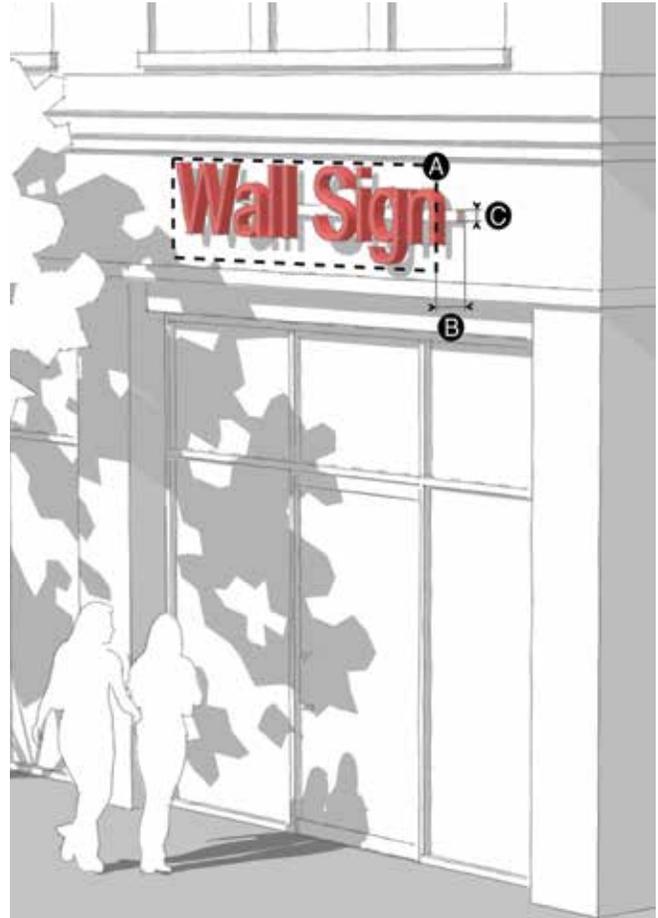

#### Description

A sign applied to or attached to the wall or surface of a building or structure, the display surface of which does not project more than 1 foot from the outside wall of the building or structure.

#### General Provisions

1. A wall sign must be placed no higher than 18 feet above the sidewalk.
2. No portion of a wall sign may extend above the roof line or above a parapet wall of a building with a flat roof.
3. A wall sign cannot cover windows or architectural details.
4. A wall sign can be externally or internally illuminated in accordance with Sec. 4.3.K.

#### Dimensions

##### Ⓐ Area (max)

HR-1, HR-2, HR-3, HR-4, HR-6 32 SF

HR-5 9 SF

HR-6 with Patton Ave frontage 50 SF

##### Ⓑ Projection - measured from building facade (max)

1'

##### Ⓒ Raceway (max % of letter height)

50%

#### Right-of-Way Encroachment

A wall sign may encroach over the public sidewalk but not over any public street or alley.

## 4.0. SITE DEVELOPMENT

### 4.3. Signs

#### E. Awning Sign



#### Description

A sign where graphics or symbols are painted, sewn, or otherwise adhered to the awning valance material as an integrated part of the awning itself.

#### General Provisions

1. An awning sign cannot extend outside the awning.
2. Only awnings over ground story doors or windows may contain signs.
3. One sign is allowed per awning. A sign can be on either the front or side valance (but no on both).
4. Signs are not allowed on the sloping face of the awning.
5. An awning sign cannot be illuminated.

#### Dimensions

##### A Area (max)

HR-1, HR-2, HR-3, HR-4, HR-6

16 SF

HR-5

9 SF

##### B Height (max)

HR-1, HR-2, HR-3, HR-4, HR-6

2'

HR-5

1'

#### Right-of-Way Encroachment

An awning sign may encroach over the public sidewalk but not over any public street or alley. The sign must be a minimum of 2 feet inside the curb line or edge of pavement, whichever is greater.

## 4.0. SITE DEVELOPMENT

### 4.3. Signs

#### F. Canopy Sign




#### Description

A sign attached to a canopy so that the display surface is parallel to the plane of the front building facade.

#### General Provisions

1. A canopy sign cannot extend outside the overall length or width of the canopy. However, a canopy sign may extend above or below the canopy.
2. A maximum of one sign is allowed per canopy.
3. Raceways are permitted for signs extending below or above the canopy. Otherwise, raceways are not permitted and the sign must be flush with the canopy face.
4. A canopy sign can be externally or internally illuminated in accordance with Sec. 4.3.K.

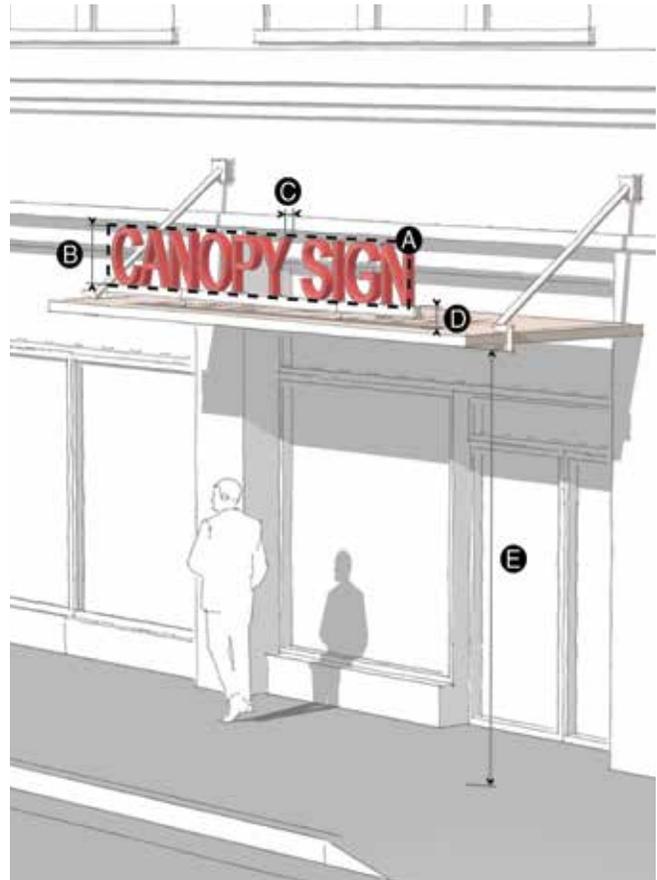

#### Dimensions

##### A Area (max)

HR-1, HR-2, HR-3, HR-4, HR-6	16 SF
HR-5	9 SF

##### B Height (max)

HR-1, HR-2, HR-3, HR-4, HR-6	2'
HR-5	1'

##### C Depth (max)

1'

##### D Raceway (max % of letter height)

50%

##### E Clear height above sidewalk (min)

9'

Clear height above parking area or driveway (min)

14'


#### Right-of-Way Encroachment

A canopy sign may encroach over the public sidewalk but not over any public street or alley. The sign must be a minimum of 2 feet inside the curb line or edge of pavement, whichever is greater.

## 4.0. SITE DEVELOPMENT

### 4.3. Signs

#### G. Projecting Sign

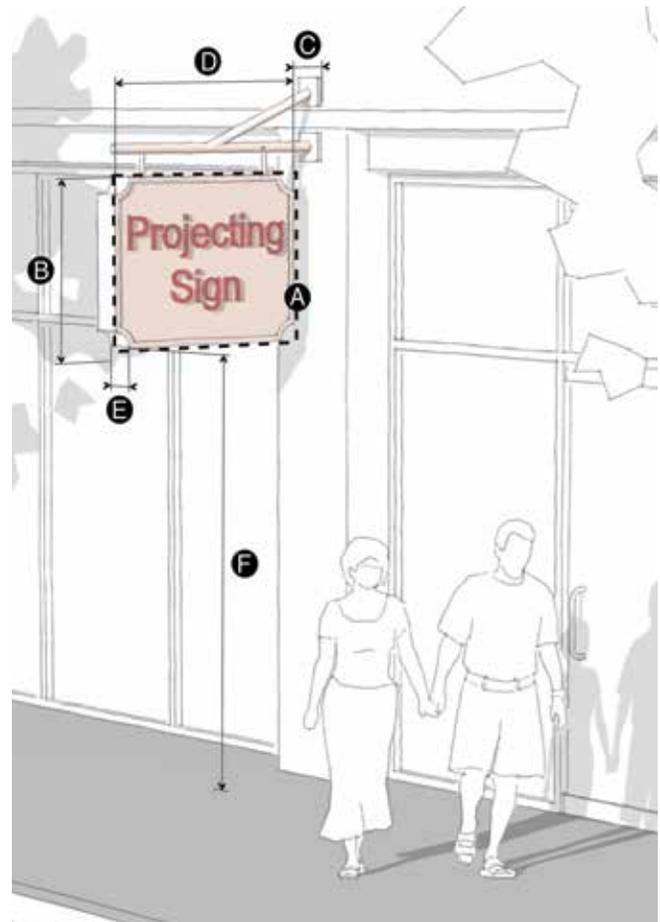

#### Description

A sign attached to the building facade at a 90-degree angle that hangs from a bracket or support extending more than 1 foot from the outside wall of the building or structure.

#### General Provisions

1. The hanging bracket must be an integral part of the sign design.
2. A projecting sign must be located below the window sills of the second story on a multi-story building or below the roof line on a single-story building.
3. A projecting sign can only be externally illuminated in accordance with Sec. 4.3.K.

#### Dimensions

<b>A</b> Area (max)	9 SF
<b>B</b> Height (max)	3'
<b>C</b> Spacing from building facade (min/max)	6"/12"
<b>D</b> Projection width (max)	3.5'
<b>E</b> Depth (max)	6"
<b>F</b> Clear height above sidewalk (min)	9'
Clear height above parking area or driveway (min)	14'


#### Right-of-Way Encroachment

A projecting sign may encroach over the public sidewalk but not over any public street or alley. The sign must be a minimum of 2 feet inside the curb line or edge of pavement, whichever is greater.

## 4.0. SITE DEVELOPMENT

### 4.3. Signs

#### H. Window Sign

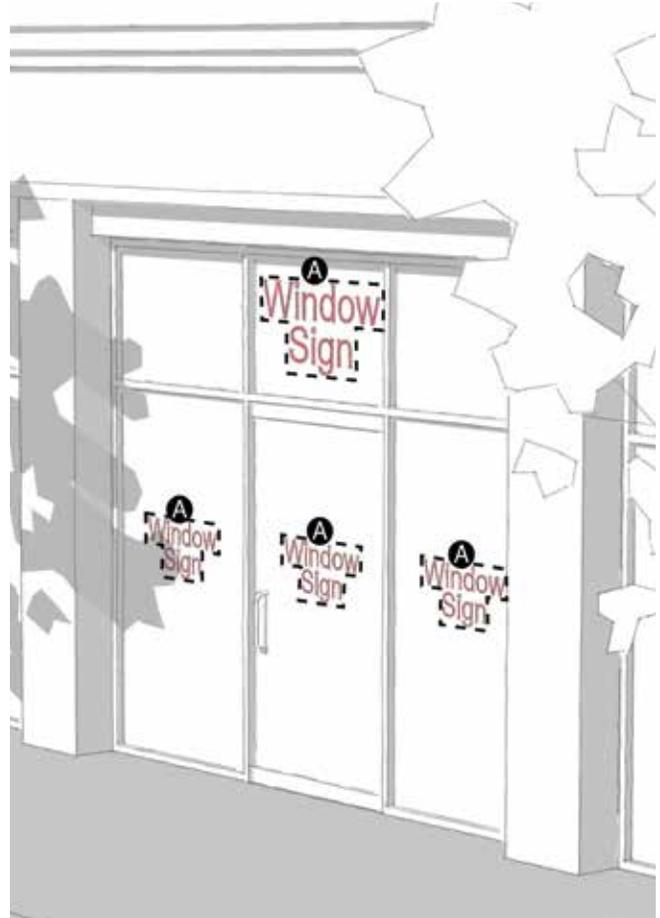

##### Description

A sign affixed to the inside of a window or door, or a sign placed within a building so as to be plainly visible and legible through a window or door.

##### General Provisions

1. Windows signs are only allowed on ground story windows and doors.
2. A window sign cannot be illuminated.

##### Dimensions

Maximum area of all ground story windows and doors covered by signs 20%

The maximum 20% coverage applies to both temporary and permanent signs, unless temporary signs placed in a window or door meet the requirements of § 7-13-4(a)(8)(b.)

##### Right-of-Way Encroachment

A window sign cannot encroach into the public right-of-way.

## 4.0. SITE DEVELOPMENT

### 4.3. Signs

#### I. Post Sign



#### Description

A permanently affixed sign which is wholly independent of a building for support where the primary support is supplied by two posts positioned no more than 6 inches from the outer edge of the sign face.

#### General Provisions

1. A post sign must be set back at least 5 feet from the primary or side street lot line and 10 feet from a side interior lot line.
2. A post sign can only be externally illuminated in accordance with Sec. 4.3.K.
3. An existing post sign may replace the sign face, provided the maximum sign area requirements of this section are met.

#### Dimensions

Ⓐ Area (max)	25 SF
Ⓑ Height (max)	12'
Ⓒ Depth (max)	1'


#### Right-of-Way Encroachment

A post sign cannot encroach into the public right-of-way.

## 4.0. SITE DEVELOPMENT

### 4.3. Signs

#### J. Monument Sign

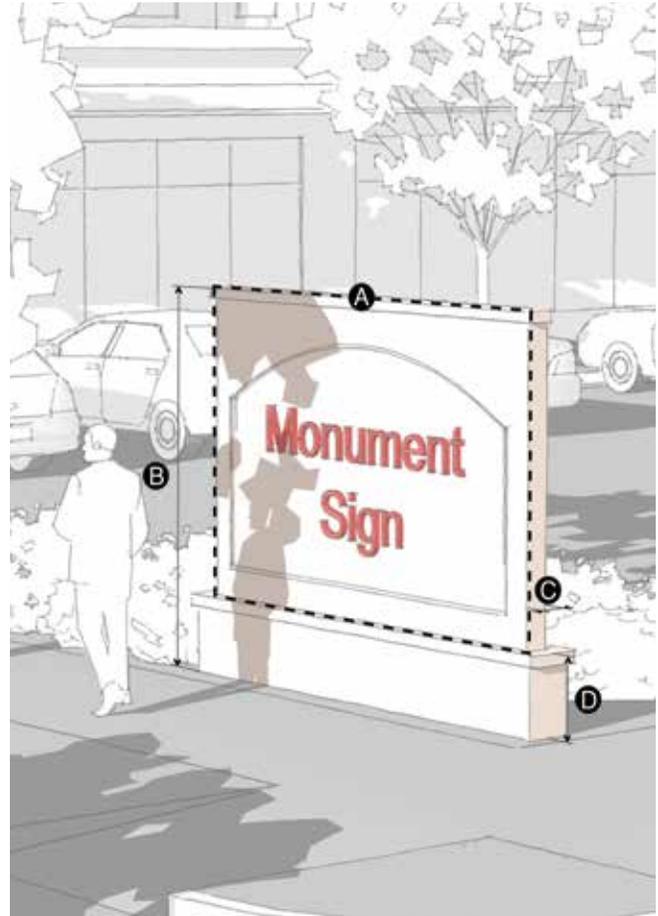

#### Description

A permanently affixed sign which is wholly independent of a building for support attached to the ground along its entire length.

#### General Provisions

1. A monument sign must be set back at least 5 feet from the primary or side street lot line and 10 feet from a side interior lot line.
2. A monument sign can be externally or internally illuminated in accordance with Sec. 4.3.K.

#### Dimensions

Ⓐ Sign area (max per sign)	64 SF
Ⓑ Height (max)	10'
Ⓒ Depth (max)	2'
Ⓓ Sign base height (min/max)	2'/4'

#### Right-of-Way Encroachment

A monument sign cannot encroach into the public right-of-way.

# 4.0. SITE DEVELOPMENT

## 4.3. Signs

### K. Illumination

Illumination of signs must be in accordance with the following requirements.

#### 1. Illumination Permitted by Sign Type

	Internal	External
Wall Sign	Yes	Yes
Awning Sign	No	No
Canopy Sign	Yes	Yes
Projecting Sign	No	Yes
Window Sign	No	No
Post Sign	No	Yes
Monument Sign	Yes	Yes

#### 2. Prohibited Light Sources

- a. Blinking, flashing and chasing.
- b. Bare bulb illumination.
- c. Colored lights used in any manner so as to be confused with or construed as traffic control devices.
- d. Direct reflected light that creates a hazard to operators of motor vehicles.
- e. Lights that outline property lines, sales areas, roof lines, doors, windows or similar area are prohibited, except for seasonal lighting or very low luminosity lighting displays using multiple lamps.

#### 3. External Illumination

- a. Lighting directed toward a sign must be shielded so that it illuminates only the face of the sign and does not shine directly onto public right-of-way or adjacent properties.
- b. Lighting fixtures must be directed downward rather than upward.
- c. Projecting light fixtures used for externally illuminated signs must be simple and unobtrusive in appearance and not obscure the sign.



External light sources



Internally lit channel letters



Back lit channel letters



Internally lit cabinet signs with darker background

4. Internal Illumination
  - a. Channel letters may be internally lit or back-lit.
  - b. For cabinet signs, the background must be opaque or a darker color than the message of the sign.
  - c. Exposed neon may be used for lettering or as an accent.
5. Raceways and Transformers
  - a. If a raceway is necessary, it cannot extend in width or height beyond the area of the sign.
  - b. A raceway must be finished to match the background wall or canopy, or integrated into the overall design of the sign.
  - c. Visible transformers are not allowed.

## 4.0. SITE DEVELOPMENT

### 4.4. Outdoor Display and Storage

#### A. Applicability

The requirements of this section apply where merchandise, material or equipment is stored outside of a completely enclosed building.

#### B. Outdoor Display

##### 1. Defined

- a. The outdoor display of products actively available for sale. The outdoor placement of propane gas storage racks, ice storage bins, soft drink, video rentals or similar vending machines is considered outdoor display.
- b. Outdoor display does not include merchandise or material in boxes, in crates, on pallets or other kinds of shipping containers (see limited outdoor storage).

##### 2. Standards

- a. Outdoor display is only allowed with a permitted ground floor nonresidential use.
- b. Outdoor display must abut the primary facade with the principal customer entrance, and may not extend more than 6 feet from the facade or occupy more than 25% of the horizontal length of the facade.
- c. Outdoor display cannot exceed 6 feet in height.
- d. Outdoor display must be removed and placed inside a fully-enclosed building at the end of each business day, except propane gas storage racks, ice storage bins, soft drink, video rentals or similar vending machines may remain outside overnight.

- e. Outdoor display may not encroach upon any public right-of-way or sidewalk. Outdoor display may not impair the ability of pedestrians to use the sidewalk. There must be a minimum of 6 feet of clear distance of sidewalk at all times.

#### C. Outdoor Storage

##### 1. Defined

- a. Outdoor storage is the overnight storage of products or materials outside of a building.
- b. Outdoor storage includes merchandise or material in boxes, in crates, on pallets or in shipping containers, the overnight outdoor storage of vehicles awaiting repair, RV's and boats, garden supplies, building supplies, plants, fleet vehicles and other similar merchandise, material, vehicles, or equipment.

##### 2. Standards

- a. Outdoor storage is not permitted except with Planning and Zoning Commission approval.
- b. The Planning and Zoning Commission will determine where outdoor storage may be allowed on the site, and its extent (vertically and horizontally) must be shown on an approved site plan.

## 5.0. ADMINISTRATION

### 5.1. Form-Based Code Administration

#### A. UDO Administrative Procedures Apply

The administrative procedures of the City's Unified Development Ordinance (Chapter 7 of the Municipal Code) apply to this form-based code, except as expressly modified below.

#### B. Pre-Application Conference Required

A pre-application conference with the City's Planning and Development staff is required prior to any application for approval under this Form-Based Code.

## 6.0. DEFINITIONS

### 6.1. Defined Terms

- A. General Meaning of Words and Terms
1. All words and terms used have their commonly accepted and ordinary meaning unless they are specifically defined in this Haywood Road Form District or the context in which they are used clearly indicates to the contrary.
  2. When vagueness or ambiguity is found to exist as to the meaning of any word or term used, any appropriate canon, maxim, principle or other technical rule of interpretations or construction used by the Courts of this State may be employed to resolve vagueness and ambiguity in language.
  3. Terms defined for the purpose of the Haywood Road Form District may be found in 7-2-5.