


NOTE:
 USE SUITABLE MATERIAL REMOVED DURING TRENCH EXCAVATION FOR
 BACKFILL UNLESS DIRECTED OTHERWISE BY ENGINEER

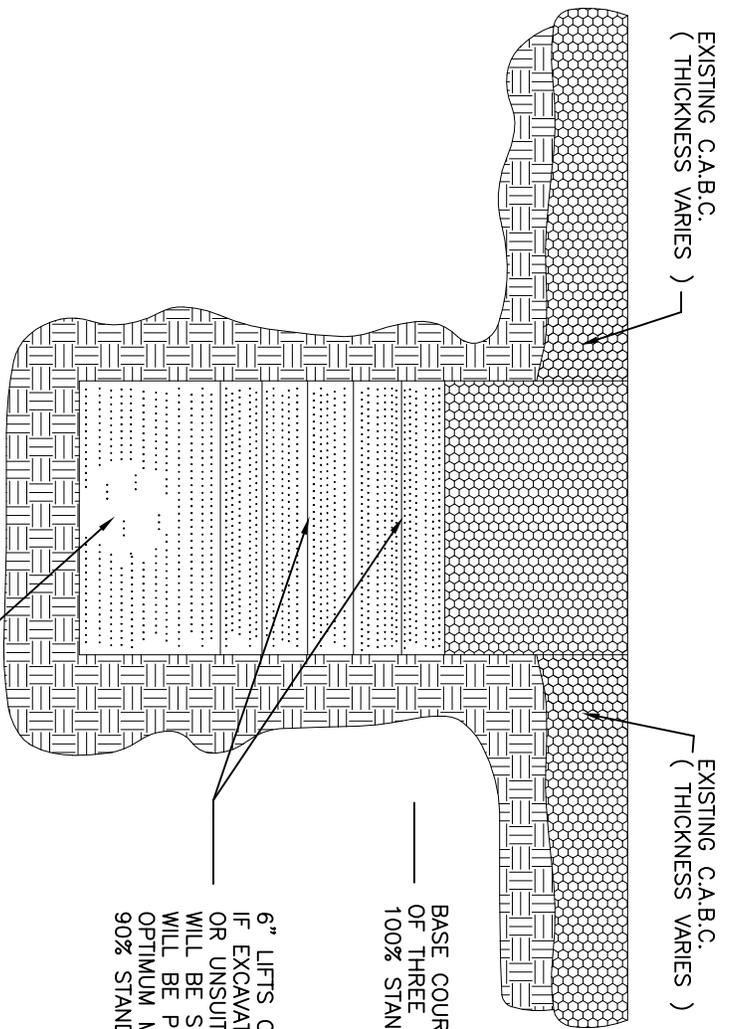

BASE COURSE CONSISTS OF A MINIMUM
 OF THREE 4" LIFTS OF C.A.D.C. COMPACTED
 100% STANDARD PROCTOR

6" LIFTS OF COMPACTED SOIL.
 IF EXCAVATED MATERIAL IS TOO WET
 OR UNSUITABLE. A PROPER FILL MATERIAL
 WILL BE SUBSTITUTED. FILL MATERIAL
 WILL BE PLACED IN 6" LIFTS AT
 OPTIMUM MOISTURE AND COMPACTED
 90% STANDARD PROCTOR.

SEE APPROPRIATE
 PIPE BEDDING DETAIL

REVISIONS	
DATE	DESCRIPTION



CITY OF ASHEVILLE, N.C.
 ENGINEERING DEPARTMENT

GRAVEL SURFACE REPAIR AND BEDDING

STD. No.

5.03